


easywash365+ car wash ceiling booms


easywash365+ double ceiling booms with suspension

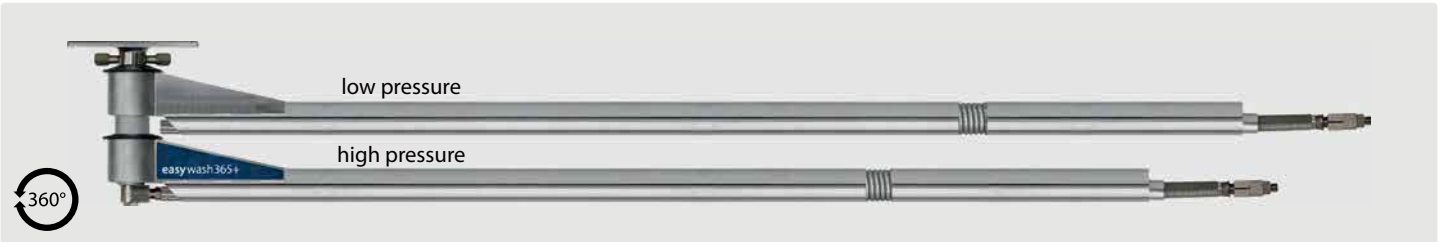

Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums.

Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	↺	⊠
109 763 904	1,600 mm / 1,750 mm	1/4" F	1/4" M	13.5 kg

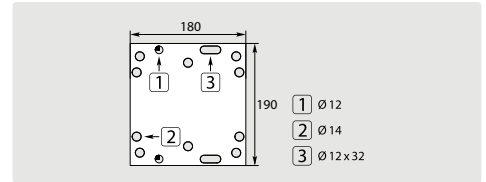


easywash365+ motorcycle ceiling booms



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using in motorcycle bays.

Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	↺	⊠
109 766 956	850 mm	1/4" F	1/4" M	5.9 kg

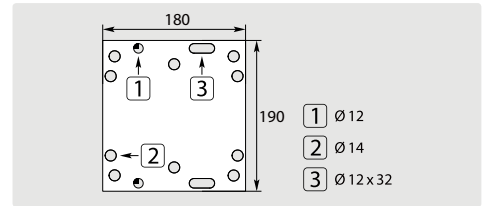

Swivels for easywash365+ ceiling booms



1/4" M BSP : 3/8" F NPT

R+M Nr.
108 409 26



1/4" M BSP : 3/8" F NPT

R+M Nr.
108 329 27

Wall mounts



Stainless steel V2A / AISI 304. For easywash365+ and Mosmatic ceiling booms

R+M Nr.
109 721 047

Positioner



Positioner with solenoid. By means of a positioning device the Mosmatic ceiling boom-Z can easily be parked in the desired position.

R+M Nr.
108 659 11

Replacement hoses

easywash365+		Mosmatic	
Hoses for easywash365+ ceiling booms		Hoses for Mosmatic ceiling booms	
R+M Nr.	↔	R+M Nr.	↔
340 144 000 994 9	800 mm	346 176 001 67	1,550 mm
340 144 001 694 9	1,550 mm	346 176 001 72	1,600 mm
340 144 001 744 9	1,600 mm	346 176 001 87	1,750 mm
340 144 001 894 9	1,750 mm	346 176 002 00	1,900 mm
340 144 002 034 9	2,050 mm	346 176 002 15	2,050 mm
		346 176 002 35	2,250 mm
		346 176 002 60	2,500 mm

Replacement spring

easywash365+		Mosmatic	
Replacement spring for easywash365+ ceiling booms		Replacement spring for Mosmatic ceiling booms	
R+M Nr.		R+M Nr.	
108 901 858		108 375 70	