


easywash365+ car wash ceiling booms

easywash365+ standard



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Max. 275 bar / 90 °C.

R+M Nr.	↔	Ⓞ	Ⓢ	Ⓜ
109 766 954	1,750 mm	1/4" F	1/4" M	8.0 kg

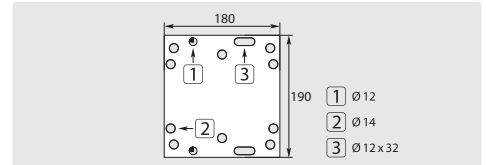


easywash365+ double ceiling booms



Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums. Max. 275 bar / 90 °C

R+M Nr.	↔	Ⓞ	Ⓢ	Ⓜ
109 767 921	1,600 mm / 1,750 mm	1/4" F	1/4" M	13.5 kg

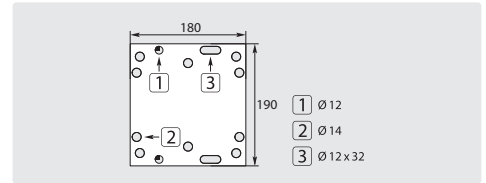

Symbols Ⓞ inlet Ⓢ outlet Ⓜ weight ↔ length shipment by truck