

## Muffen Kesselseite



Ghibli

| R+M Nr. | Ø     | F     |
|---------|-------|-------|
| 264 054 | 49 mm | 38 mm |



| R+M Nr. | Ø     | F     |
|---------|-------|-------|
| 264 055 | 49 mm | 38 mm |



| R+M Nr. | Ø     | A     |
|---------|-------|-------|
| 263 655 | 49 mm | 32 mm |



| R+M Nr. | Ø     | A     |
|---------|-------|-------|
| 265 054 | 58 mm | 32 mm |



| R+M Nr. | Ø     | L     |
|---------|-------|-------|
| 265 055 | 58 mm | 50 mm |



| R+M Nr. | Ø     | F     |
|---------|-------|-------|
| 265 053 | 58 mm | 38 mm |

## Saugerschläuche

### Schwarz

- 20 °C - + 60 °C



| R+M Nr.    | TYP | DN    | Außen Ø | ↔        |
|------------|-----|-------|---------|----------|
| 262 548 20 | A   | 25 mm | 32,0 mm | 20 m     |
| 263 648 20 | A   | 32 mm | 40,0 mm | 20 m     |
| 263 548 20 | A   | 35 mm | 43,3 mm | 20 m     |
| 264 048 *  | F   | 38 mm | 47,0 mm | 1 - 20 m |
| 264 048 20 | F   | 38 mm | 47,0 mm | 20 m     |
| 265 048 *  | L   | 50 mm | 60,0 mm | 1 - 20 m |
| 265 048 20 | L   | 50 mm | 60,0 mm | 20 m     |

### Grau

- 20 °C - + 60 °C



| R+M Nr.    | TYP | DN    | Außen Ø | ↔        |
|------------|-----|-------|---------|----------|
| 263 645 *  | A   | 32 mm | 40,0 mm | 1 - 20 m |
| 263 645 20 | A   | 32 mm | 40,0 mm | 20 m     |
| 264 045 *  | F   | 38 mm | 47,0 mm | 1 - 20 m |
| 264 045 20 | F   | 38 mm | 47,0 mm | 20 m     |
| 265 045 *  | L   | 50 mm | 60,0 mm | 1 - 20 m |
| 265 045 20 | L   | 50 mm | 60,0 mm | 20 m     |

### Silber

- 20 °C - + 60 °C



| R+M Nr.    | TYP | DN    | Außen Ø | ↔    |
|------------|-----|-------|---------|------|
| 262 549 20 | A   | 25 mm | 32,0 mm | 20 m |
| 262 749 20 |     | 27 mm | 34,5 mm | 20 m |
| 263 249 20 | A   | 32 mm | 40,0 mm | 20 m |
| 263 649 20 | A   | 36 mm | 44,3 mm | 20 m |
| 264 049 20 | F   | 38 mm | 47,0 mm | 20 m |
| 265 049 20 | L   | 50 mm | 60,0 mm | 20 m |

### Blau

- 20 °C - + 60 °C



| R+M Nr.    | TYP | DN    | Außen Ø | ↔    |
|------------|-----|-------|---------|------|
| 264 047 20 | F   | 38 mm | 47,0 mm | 20 m |

### Schwarz antistatisch


- 50 °C - + 60 °C. 10<sup>6</sup> Ω/m elektrisch ableitend



| R+M Nr.    | TYP | DN    | Außen Ø | ↔    |
|------------|-----|-------|---------|------|
| 262 548 30 | A   | 25 mm | 35,5 mm | 30 m |
| 263 646 30 | A   | 32 mm | 40,5 mm | 30 m |
| 264 046 30 | F   | 38 mm | 48,0 mm | 30 m |
| 265 046 30 | L   | 50 mm | 61,0 mm | 30 m |

### EVA Silber - blau

- 45 °C - + 65 °C

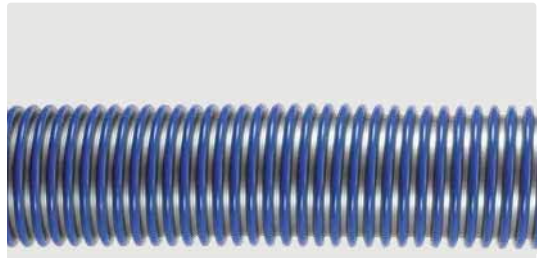

| R+M Nr.      | TYP | DN    | Außen Ø | ↔        |
|--------------|-----|-------|---------|----------|
| 263 660 01 * | A   | 35 mm | 42,4 mm | 1 - 30 m |
| 263 660 30   | A   | 35 mm | 42,4 mm | 30 m     |
| 264 060 01 * | F   | 38 mm | 47,6 mm | 1 - 30 m |
| 264 060 30   | F   | 38 mm | 47,6 mm | 30 m     |
| 265 060 01 * | L   | 50 mm | 60 mm   | 1 - 30 m |
| 265 060 30   | L   | 50 mm | 60 mm   | 30 m     |

### Braun

- 20 °C - + 120 °C (kurzzeitig bis + 150 °C)



### Öl- und temperaturbeständig

| R+M Nr.    | TYP | DN    | Außen Ø | ↔        |
|------------|-----|-------|---------|----------|
| 263 644 *  |     | 36 mm | 44,7 mm | 1 - 20 m |
| 263 644 20 | A   | 36 mm | 44,7 mm | 20 m     |
| 265 044 *  | A   | 50 mm | 61,0 mm | 1 - 25 m |
| 265 044 25 | L   | 50 mm | 61,0 mm | 25 m     |

\* Meterware