

## Suttner barrel cleaner

ST-82 e25 / 21 power-operated barrel cleaner CE



- » Inlet: M22 M
- » Pressure: max. 220 bar
- » Flow: max. 21 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Coverage 360°
- » Weight: 3.2 kg
- » Nozzles are included in the scope of delivery

<b>R+M Nr.</b>
200 082 500

## Barrel cleaner

M 28 E power-operated barrel cleaner with exhaust + CE




- » Inlet: M22 M
- » Pressure: max. 140 bar
- » Flow: 10 - 25 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Coverage 360°
- » Weight: 6.2 kg
- » Nozzles are included in the scope of delivery

<b>R+M Nr.</b>
276 284 380

## Longcast nozzle

- » Stainless steel
- » Applications: cleaning of shafts
- » Extremely high impact force
- » Long reach
- » Nozzle protection
- » Max. 500 bar / 150 °C

<b>R+M Nr.</b>		
040 001 963	5 mm	3/4" M

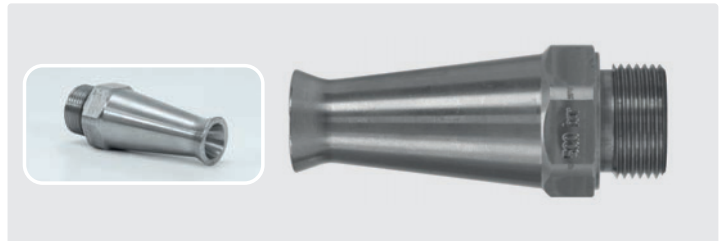

Industrial high-flow gun ST-3500, lance 500 mm with side handle.  
Long Cast Nozzle.  
Max. 350 bar / 200 l/min / 150 °C

**Application:**

- » Man hole cleaning
- » Paper Industry. Removal of snow balls during fibre jetting
- » Cleaning Tasks in Off-Shore or Marine Applications

<b>R+M Nr.</b>		
203 500 560	750 mm	1/2" F swivel



Symbols  inlet  outlet  nozzle  flow  pressure  diameter  length