

Vacuum motors



1 stage. 230 V / 50 Hz.
Cable type 2 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 110 101	061200219 / 6110930052	1,100	133	49	148	1



2 stage. 24 V.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 050 230	069103006	500	171	68	144	1




2 stage. 230 V / 50 Hz.
Cable type 1 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 080 103	universal	800	168	67	144	1
262 080 103 006	universal	800	168	67	144	6
262 100 103	universal	1,000	174	67	144	1
262 100 103 006	universal	1,000	174	67	144	6
262 120 103	universal	1,200	175	66	144	1
262 120 103 006	universal	1,200	175	66	144	6
262 120 303	universal	1,200	168	67	144	1
262 120 303 006	universal	1,200	168	67	144	6
262 120 704	universal	1,200	174	67	144	1
262 120 704 006	universal	1,200	174	67	144	6

With thermal safety device

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 203	universal	1,200	178	72	144	1
262 120 203 006	universal	1,200	178	72	144	6
262 140 103	universal	1,400	176	72	144	1
262 140 103 006	universal	1,400	176	72	144	6

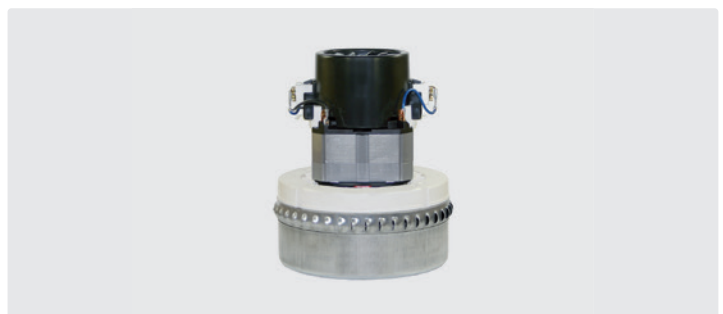

2 stage. 230 V / 50 Hz.
Cable type 1 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 080 102	361	800	163	72	144	1
262 100 102	7568	1,000	170	72	144	1
262 120 102	7778-5	1,200	178	72	144	1
262 120 302	7363-12	1,200	163	72	144	1
262 120 702	586-2	1,200	170	67	144	1

With thermal safety device

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 202	7778-4	1,200	178	72	144	1
262 140 102	7788	1,400	176	72	144	1



2 stage. 230 V / 50 Hz.
Cable type 2 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 100 202	BDS 10302 / 6110930135	1.000	167	70	144	1
262 120 602	BDS 12382 / 6110930141	1.200	176	70	144	1