


Suttner regulation valves ST-261

Repair kits ST-261

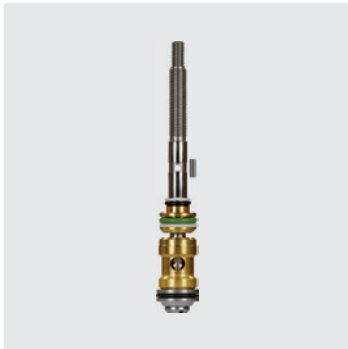

Piston rod

R+M Nr.
200 261 526



Pressure switch (IP55) with cable 1,200 mm

R+M Nr.
200 261 517



Pressure rod

R+M Nr.
200 261 527



Handgrip

R+M Nr.
200 260 547



HP check valve

R+M Nr.
200 261 528



Metering valve. Tail 6 mm

R+M Nr.
050 000 370 1
200 061 500 2



Pressure switch (IP65) three-core and cable 1,200 mm

R+M Nr.
200 261 513




Pressure switch (IP65) with four-core and cable 1,200 mm

R+M Nr.
200 261 514



Micro switch

R+M Nr.
090 000 050



Chemical check valve. Hose tail 6 mm

R+M Nr.
200 060 725




Tamperproof cap for ST-261. Not suitable for panel mounting.

R+M Nr.
020 000 277

Suttner regulation valve ST-265

ST-265

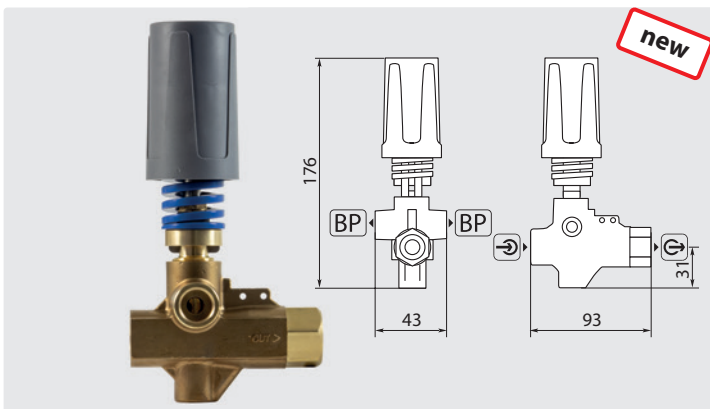

☉ = Inlet 3/8" F. ☉ = Outlet 3/8" F.
 [BP] = Bypass 3/8" F. Check Valve with ball.
 Max. 350 bar / 80 °C

R+M Nr.	☉
200 265 500	50 l/min

ST-265 with switch



☉ = Inlet 3/8" F. ☉ = Outlet 3/8" F.
 [BP] = Bypass 3/8" F.
 Ball check valve. Unloader valve with pressure switch (IP65) and cable 1,200 mm. Max. 350 bar / 80 °C

R+M Nr.	☉
200 265 550	50 l/min

Repair/retrofit kit switch ST-265



Switch for Suttner unloader valve ST-265. Protection class IP65. Cable 1.200 mm, 3xAWG20. Maximum inrush current: 10mA-5A(2A). Voltage: 12-24VDC, 12-250VAC

R+M Nr.
200 265 430

Symbols ☐ flow ☉ inlet ☉ outlet [BP] bypass [MN] pressure gauge