


High pressure check valves ST-264

new



1/4" M. Stainless steel.
 ⓘ 37.8 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 700	17 mm



1/4" F. Stainless steel.
 ⓘ 62 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 500	19 mm



1/4" F. Brass.
 ⓘ 62 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 510	19 mm



3/8" F. Stainless steel.
 ⓘ 65 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 520	22 mm



3/8" F. Brass.
 ⓘ 65 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 530	22 mm



1/2" F. Stainless steel.
 ⓘ 90 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 540	27 mm

Thermal relief valves



1/2" M : hose tail 6 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 50




3/8" M : hose tail 6 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 65



1/2" M : hose tail 6 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 55

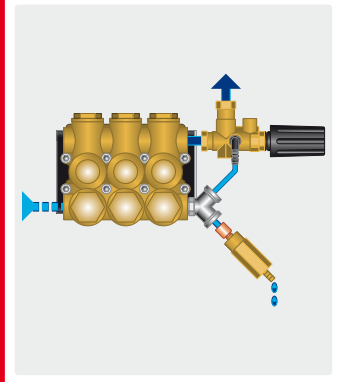Assembly instructions
of a relief valves

High Pressure Filter

new



Brass with stainless steel filter. Bidirectional.
 Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.	ⓘ	⊙	⊙
200 033 855	45.6 mm	1/4" M	1/4" F

Symbols ⊕ inlet ⊖ outlet [BP] bypass ⓘ height [SW] hexagon [TYP] type ∅ diameter ⊙ thread