


High pressure check valves ST-264



1/4" F. Stainless steel.
 Ⓜ 62 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 500	19 mm



1/4" F. Brass.
 Ⓜ 62 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 510	19 mm



3/8" F. Stainless steel.
 Ⓜ 65 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 520	22 mm



3/8" F. Brass.
 Ⓜ 65 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 530	22 mm



1/2" F. Stainless steel.
 Ⓜ 90 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 540	27 mm



1/2" F. Stainless steel.
 Ⓜ 90 mm. Opening
 pressure 10 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 541	27 mm



1/4" M. Stainless steel.
 Ⓜ 37.8 mm. Opening
 pressure 0.05 - 0.1 bar.
 Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 700	17 mm

Thermal relief valves




1/2" M : hose tail 8 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 50




3/8" M : hose tail 8 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 65



1/2" M : hose tail 8 mm. Valve with
 copper sonde. Working temperature
 63 °C. Max. 10 bar

R+M Nr.
910 55

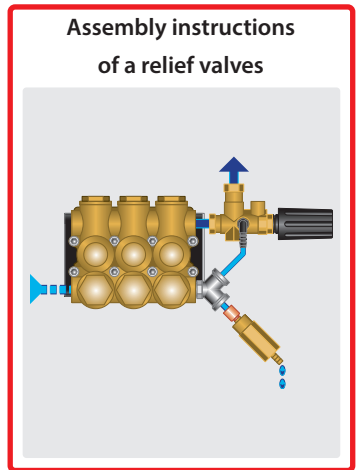

High Pressure Filter ST-33



Brass with stainless steel filter. Bidirectional.
 Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.	Ⓜ	Ⓞ	Ⓞ
200 033 855	45.6 mm	1/4" M	1/4" F

Ultra High Pressure Filter



Stainless steel with brass mesh holder and stainless steel strainer. Suitable
 as inlet water filter for ST-164. Max. 400 bar / 100 °C

R+M Nr.	Ⓜ	Ⓞ	Ⓞ
200 163 100	40 mm	M 22 M	3/8" M