


High pressure solenoid valves closed in off-position


Danfoss VDHT

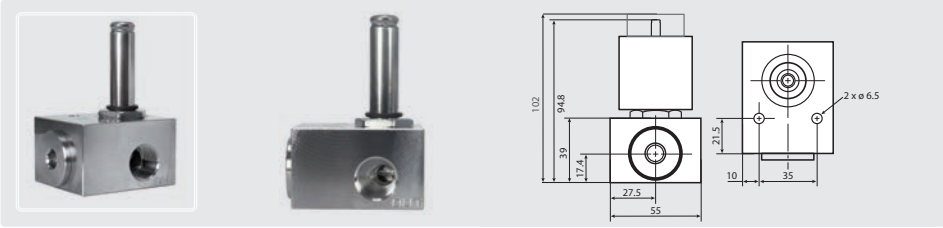

Stainless steel. Viton. Pressure range 0 - 160 bar. Without coil. Max. 90 °C

R+M Nr.		
837 180 094	1/2"	60 l/min
837 180 092	3/8"	30 l/min

Danfoss solenoid coil

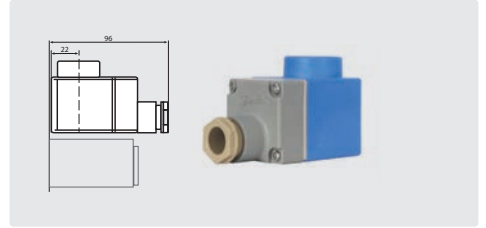

24 V / DC / 16 W

R+M Nr.
837 018 791 4

Rapa SV 04



1/4" F. NW 1.5 mm. Solenoid valve with connector. Pressure range 0 - 130 bar. Max. 90 °C

R+M Nr.	
832 01	24 V =
832 00	24 V ~ 50 Hz
832 10	230 V ~ 50 Hz

AK



1/4" F. NW 1.2 mm. Solenoid valve without connector. Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.			
833 10	48 mm	109 mm	24 V =

Connector



R+M Nr.
833 50

AK



1/4" F. NW 1.2 mm. Solenoid valve with connector. Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.			
833 15	48 mm	109 mm	24 V ~ 50 Hz
833 00	48 mm	109 mm	230 V ~ 50 Hz

Symbols thread height length voltage flow TYP type inlet outlet diameter