



## Manomètres haute-pression à glycérine




∅ 63 mm. 1/4" M. Boîtier inox.  
Entrée verticale

R+M Nr.	indication
549 00	0 - 40 bar . 0 - 580 PSI
549 10	0 - 100 bar . 0 - 1.500 PSI
549 20	0 - 160 bar . 0 - 2.500 PSI
549 30	0 - 250 bar . 0 - 4.000 PSI
549 40	0 - 400 bar . 0 - 6.000 PSI
549 50	0 - 600 bar . 0 - 8.000 PSI




∅ 63 mm. 1/4" M. Boîtier inox.  
Entrée latérale

R+M Nr.	indication
548 10	0 - 100 bar . 0 - 1.500 PSI
548 20	0 - 160 bar . 0 - 2.500 PSI
548 30	0 - 250 bar . 0 - 4.000 PSI
548 40	0 - 400 bar . 0 - 6.000 PSI




∅ 63 mm. 1/4" M. Avec anneau de fixation frontal. Boîtier inox. Entrée latérale

R+M Nr.	indication
549 90	0 - 250 bar . 0 - 4.000 PSI



∅ 63 mm. 1/4" M. Boîtier inox.  
Entrée verticale. Type WIKA


R+M Nr.	indication
549 102*	0 - 100 bar . 0 - 1.500 PSI
549 202	0 - 160 bar . 0 - 2.500 PSI
549 302	0 - 250 bar . 0 - 4.000 PSI
549 402	0 - 400 bar . 0 - 6.000 PSI
549 502	0 - 600 bar . 0 - 8.000 PSI



∅ 63 mm. 1/4" M. Boîtier inox.  
Entrée latérale. Type WIKA


R+M Nr.	indication
548 102*	0 - 100 bar . 0 - 1.500 PSI
548 202	0 - 160 bar . 0 - 2.500 PSI
548 302	0 - 250 bar . 0 - 4.000 PSI
548 402	0 - 400 bar . 0 - 6.000 PSI
548 631 000	0 - 1.000 bar . 0 - 15.000 PSI

### Flexibles de liaison pour manomètres

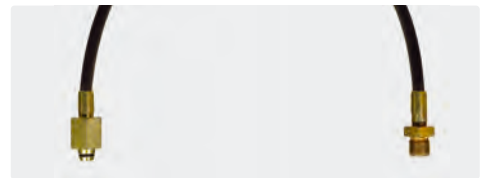


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	↻	⊕
495 261 040 5	405 mm	M12x1,5 F	M10x1 M

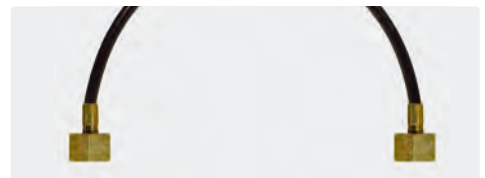


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	↻	⊕
495 252 050 0	500 mm	1/4" F	1/4" F
495 252 070 0	700 mm	1/4" F	1/4" F




∅ 50 mm. 1/4" M. Boîtier inox.  
Entrée verticale. Type WIKA

R+M Nr.	indication
549 352	0 - 250 bar . 0 - 4.000 PSI
549 452	0 - 400 bar . 0 - 6.000 PSI




∅ 50 mm. 1/4" M. Boîtier inox.  
Entrée latérale. Type WIKA

R+M Nr.	indication
548 352	0 - 250 bar . 0 - 4.000 PSI
548 432	0 - 400 bar . 0 - 6.000 PSI

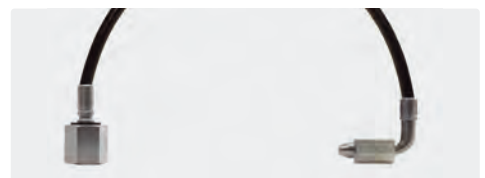


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	↻	⊕
495 253 100 0	1.000 mm	1/4" F	1/4" F 90°



∅ 50 mm. 1/4" M. Boîtier inox.  
Entrée verticale

R+M Nr.	indication
549 35	0 - 250 bar . 0 - 4.000 PSI
549 45	0 - 400 bar . 0 - 6.000 PSI



∅ 50 mm. 1/4" M. Boîtier inox.  
Entrée latérale


R+M Nr.	indication
548 35	0 - 250 bar . 0 - 4.000 PSI
548 43	0 - 400 bar . 0 - 6.000 PSI

### Étrier de fixation

Pour tous les manomètres sauf WIKA



R+M Nr.	TYP
548 50	∅ 63 mm
548 55	∅ 50 mm



∅ 40 mm. 1/8" M. Boîtier PVC.  
Entrée latérale

R+M Nr.	indication
548 37	0 - 250 bar . 0 - 4.000 PSI

**Avant la première mise sous pression, veuillez couper le téton de mise à l'air libre du manomètre.**