

Plugs

Locknut

Male thread



Brass. With hexagon

R+M Nr.	P	⊥
578 01	250 bar	11 mm
578 15	250 bar	13 mm
578 25	250 bar	15 mm
578 30	250 bar	18 mm
578 40	150 bar	24 mm



Brass. With hexagon

R+M Nr.	P	⊥
578 00	250 bar	8 mm
578 10	250 bar	10 mm
010 000 365	250 bar	10 mm



Nickel-plated brass

R+M Nr.	⊥
574 638	5.5 mm

AG
1/8"
1/4"
3/8"
1/2"
3/4"



Stainless steel. With hexagon

R+M Nr.	P	⊥
578 09	250 bar	11 mm
578 309	250 bar	18 mm




Stainless steel. With hexagon

R+M Nr.	P	⊥
578 109	250 bar	10 mm

AG
1/8"
1/4"
1/2"

Distribution fittings

Cross

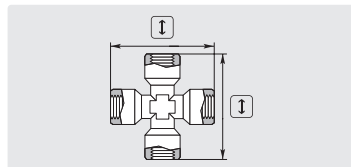


F. Nickel-plated brass

R+M Nr.	P	⊥
574 514	150 bar	51 mm


⊙
1/4"
3/8"
1/2"

3-way



F. Nickel-plated brass

R+M Nr.	P	↔	⊥
574 00	150 bar	32	36
574 10	150 bar	37	40
574 15	150 bar	45	53

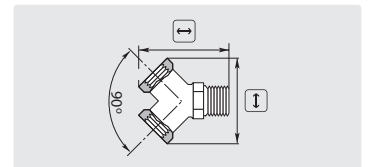

F : M. Nickel-plated brass

R+M Nr.	P	↔	⊥
574 35	150 bar	42	40

Swivel connectors

Female thread : male thread



Stainless steel

R+M Nr.	P	⊥
582 03	350 bar	34 mm
582 04	350 bar	42 mm
582 02	200 bar	44 mm
582 01	350 bar	44 mm

R+M Nr.	P	⊥
582 039	350 bar	34 mm
582 049	350 bar	42 mm
582 029	200 bar	44 mm
582 019	350 bar	44 mm

IG : AG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"
1/2" : 3/8"

Symbols IG female thread AG male thread ↔ length ⊥ height P pressure