


## Drehverschraubungen ST-241

### Drehverschraubungen mit Innenabdichtung



HV 1/2" : IG. Max. 300 bar / 150 °C

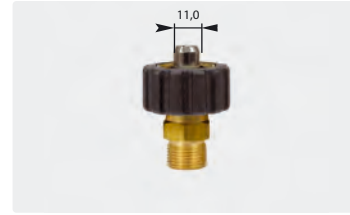

HV 1/2" : AG. Max. 300 bar / 150 °C

☉	
1/4"	
3/8"	
1/2"	

R+M Nr.	ⓘ
200 241 500	52 mm
200 241 520	52 mm
200 241 540	53 mm


R+M Nr.	ⓘ
200 241 510	56 mm
200 241 530	56 mm
200 241 550	58 mm



IG : 1/2" AG. Max. 300 bar / 150 °C



AG : 1/2" AG. Max. 300 bar / 150 °C

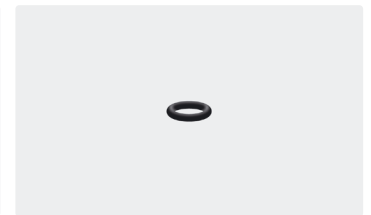

O-Ring Gegennippel

☉	
1/4"	
3/8"	
1/2"	


R+M Nr.	ⓘ
200 241 700	34 mm
200 241 720	34 mm
200 241 740	36 mm

R+M Nr.	ⓘ
200 241 710	38 mm
200 241 730	38 mm
200 241 750	40 mm

R+M Nr.	VPE
050 000 160	1
791 025 100	100

## Mosmatic Drehverschraubungen (Swivel)


### Handverschraubung : Außengewinde

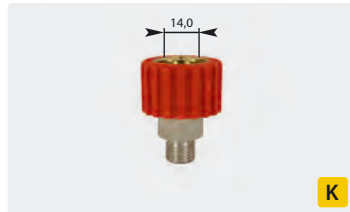

HV M22 : AG. Max. 250 bar / 120 °C



HV M21 : AG. Max. 250 bar / 120 °C

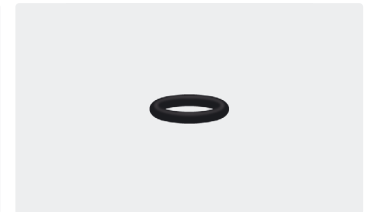

O-Ring Swivel MSM


☉	
1/4"	
3/8"	
M18	
M22	

R+M Nr.	ⓘ
108 701 01	47 mm
108 701 03	48 mm
108 701 07	42 mm
108 701 09	46 mm

R+M Nr.	ⓘ
108 700 01	47 mm
108 700 03	48 mm
108 700 07	42 mm

R+M Nr.	VPE
790 35	1
790 351 00	100

### Handverschraubung : Innengewinde

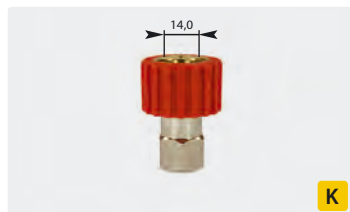

HV M22 : IG. Max. 250 bar / 120 °C



HV M21 : IG. Max. 250 bar / 120 °C

☉	
1/4"	
3/8"	

R+M Nr.	ⓘ
108 701 02	47 mm
108 701 04	48 mm

R+M Nr.	ⓘ
108 700 02	47 mm
108 700 04	48 mm