

Sewer cleaning hose assemblies

without nozzle

QSC : male thread + O-ring

Plug : male thread + O-ring

M22 : 1/8"

M22 : 1/4"

M21 : 1/8"


KW : 1/8"

KW : 1/4"

KW : 1/8"

K : 1/8"

K : 1/8"

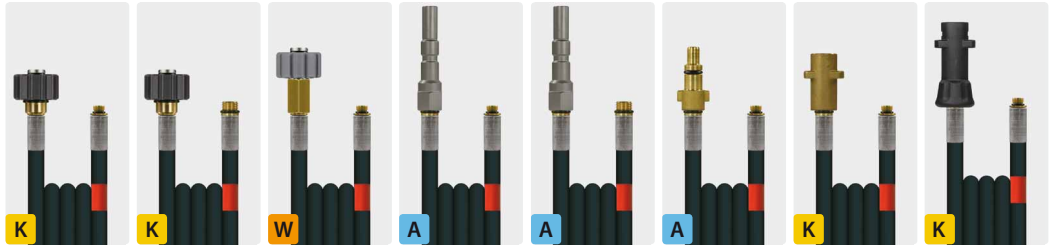

Hoses with single wire braid and smooth cover

| TYP | DN | P | °C | ↔ | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | |
|-------|----|---------|--------|------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--|
| Flexy | 6 | 300 bar | 100 °C | 10 m | 420 300 010 | 420 301 010 | 420 315 010 | 420 335 010 | 420 336 010 | 420 330 010 | 420 345 010 | | |
| | | | | | 15 m | 420 300 015 | 420 301 015 | 420 315 015 | 420 335 015 | 420 336 015 | 420 330 015 | 420 345 015 | |
| | | | | | 20 m | 420 300 020 | 420 301 020 | 420 315 020 | 420 335 020 | 420 336 020 | 420 330 020 | 420 345 020 | |
| | | | | | 25 m | 420 300 025 | 420 301 025 | 420 315 025 | 420 335 025 | 420 336 025 | 420 330 025 | 420 345 025 | |
| | | | | | 30 m | 420 300 030 | 420 301 030 | 420 315 030 | 420 335 030 | 420 336 030 | 420 330 030 | 420 345 030 | |

Plastic hoses with single fabric braid

| TYP | DN | P | °C | ↔ | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | |
|-------|----|---------|-------|------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Polya | 5 | 200 bar | 20 °C | 10 m | 410 000 010 | | 410 015 010 | 410 035 010 | | 410 030 010 | | 410 045 010 | |
| | | | | | 15 m | 410 000 015 | | 410 015 015 | 410 035 015 | | 410 030 015 | | 410 045 015 |
| | | | | | 20 m | 410 000 020 | | 410 015 020 | 410 035 020 | | 410 030 020 | | 410 045 020 |
| | | | | | 25 m | 410 000 025 | | 410 015 025 | 410 035 025 | | 410 030 025 | | 410 045 025 |
| | | | | | 30 m | 410 000 030 | | 410 015 030 | 410 035 030 | | 410 030 030 | | 410 045 030 |
| Polya | 5 | 120 bar | 20 °C | 10 m | 400 000 010 | | 400 015 010 | 400 035 010 | | 400 030 010 | | 400 045 010 | |
| | | | | | 15 m | 400 000 015 | | 400 015 015 | 400 035 015 | | 400 030 015 | | 400 045 015 |
| | | | | | 20 m | 400 000 020 | | 400 015 020 | 400 035 020 | | 400 030 020 | | 400 045 020 |
| | | | | | 25 m | 400 000 025 | | 400 015 025 | 400 035 025 | | 400 030 025 | | 400 045 025 |
| | | | | | 30 m | 400 000 030 | | 400 015 030 | 400 035 030 | | 400 030 030 | | 400 045 030 |

without nozzle

Plug : M + O-ring

M : M + O-ring

M thread + O-rings


ST-247 : 1/8"

M22 : 1/8"

M22 : 1/4"

1/8" : 1/8"

1/4" : 1/4"

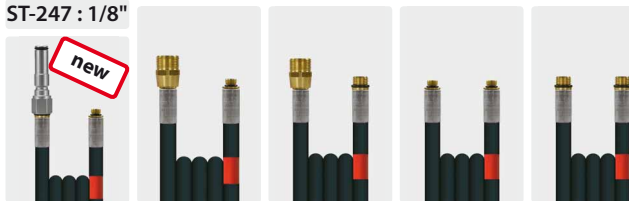

As required our sewer cleaning hoses have a safety clearance marking directly on the hose which is placed 0.5 m of the nozzle.



Hoses with single wire braid and smooth cover

| TYP | DN | P | °C | ↔ | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | |
|-------|----|---------|--------|------|-------------|-------------|-------------|-------------|-------------|-------------|
| Flexy | 6 | 300 bar | 100 °C | 10 m | 420 361 010 | 420 310 010 | 420 311 010 | 420 340 010 | 420 342 010 | |
| | | | | | 15 m | 420 361 015 | 420 310 015 | 420 311 015 | 420 340 015 | 420 342 015 |
| | | | | | 20 m | 420 361 020 | 420 310 020 | 420 311 020 | 420 340 020 | 420 342 020 |
| | | | | | 25 m | 420 361 025 | 420 310 025 | 420 311 025 | 420 340 025 | 420 342 025 |
| | | | | | 30 m | 420 361 030 | 420 310 030 | 420 311 030 | 420 340 030 | 420 342 030 |

Plastic hoses with single fabric braid

| TYP | DN | P | °C | ↔ | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | |
|-------|----|---------|-------|------|---------|-------------|-------------|-------------|-------------|--|
| Polya | 5 | 200 bar | 20 °C | 10 m | | 410 010 010 | | 410 040 010 | | |
| | | | | | 15 m | | 410 010 015 | | 410 040 015 | |
| | | | | | 20 m | | 410 010 020 | | 410 040 020 | |
| | | | | | 25 m | | 410 010 025 | | 410 040 025 | |
| | | | | | 30 m | | 410 010 030 | | 410 040 030 | |
| Polya | 5 | 120 bar | 20 °C | 10 m | | 400 010 010 | | 400 040 010 | | |
| | | | | | 15 m | | 400 010 015 | | 400 040 015 | |
| | | | | | 20 m | | 400 010 020 | | 400 040 020 | |
| | | | | | 25 m | | 400 010 025 | | 400 040 025 | |
| | | | | | 30 m | | 400 010 030 | | 400 040 030 | |