

Lances

ST-001 with insulation ST-9.9



Kr A

Plug KW. Lance with insulation ST-9.9 and ST-51 adjustable nozzle. Max. 250 bar / 150 °C

R+M Nr.	⊖	ISO	↔	M
511 505 910	1/4" F	330 mm	1,000 mm	stainless steel

R+M Nr.




A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	M
511 505 901	1/8" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.

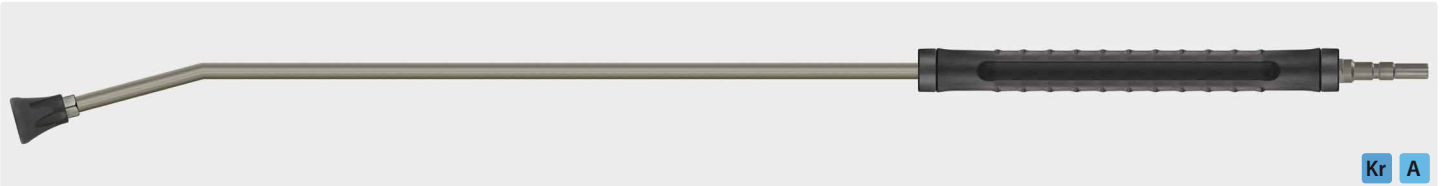

Kr A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	M
511 505 905	1/4" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.

ST-247 with insulation ST-9.9



new

Plug ST-247. Lance with insulation ST-9.9 and hydroblade® nozzle protector without hydroblade® nozzles. Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	M
514 524 700	hydroblade®	330 mm	1.000 mm	stainless steel

R+M Nr.



new

Plug ST-247. Lance with insulation ST-9.9 and hydroblade® nozzle protector without hydroblade® nozzles. Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	M
514 524 701	hydroblade®	330 mm	1.000 mm	stainless steel

R+M Nr.