


High pressure telescopic lances

- » Light and handy. Length easily adjustable. Adjustable from 2.3 m to 7.4 m.
- » Lance with embedded high pressure hose and mounted Suttner gun ST-601. Lance without high pressure nozzle.
- » Max. 275 bar / 100 °C

Our telescopic high pressure lances are up to 30 % lighter than comparable lances.




R+M Nr.	Ⓢ	Ⓜ	↔	Ⓒ
525 070 8	2.4 kg	1/4" M	2.3 - 3.8 m	3/8" F
525 085 8	4.3 kg	1/4" M	2.3 - 5.6 m	3/8" F
525 100 8	5.4 kg	1/4" M	2.9 - 7.4 m	3/8" F

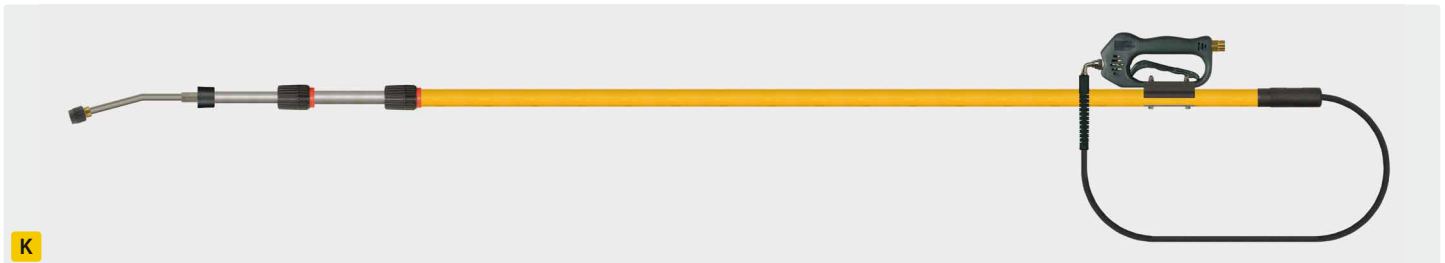

K

R+M Nr.	Ⓢ	Ⓜ	↔	Ⓒ
525 070 1	2.6 kg	nozzle protector without tip	2.3 - 3.8 m	M22 M
525 085 1	4.5 kg	nozzle protector without tip	2.3 - 5.6 m	M22 M
525 100 1	5.6 kg	nozzle protector without tip	2.9 - 7.4 m	M22 M

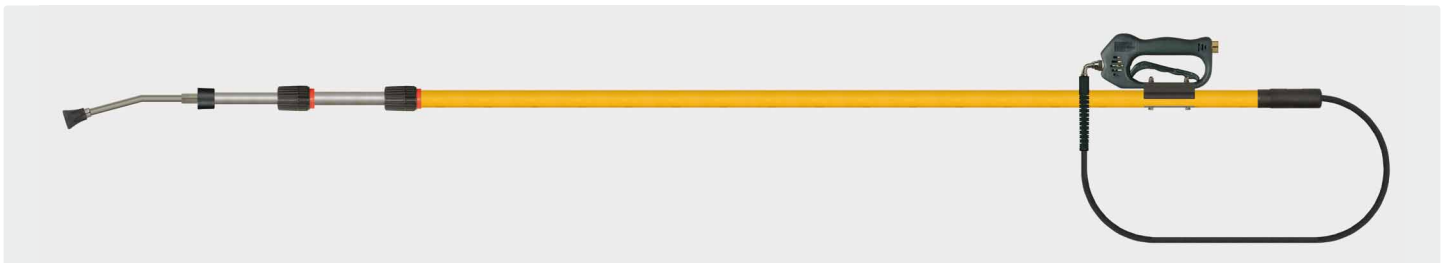

R+M Nr.	Ⓢ	Ⓜ	↔	Ⓒ
525 070 2	2.6 kg	nozzle protector ST-10 - 1/4" F NPT	2.3 - 3.8 m	3/8" F
525 085 2	4.5 kg	nozzle protector ST-10 - 1/4" F NPT	2.3 - 5.6 m	3/8" F
525 100 2	5.6 kg	nozzle protector ST-10 - 1/4" F NPT	2.9 - 7.4 m	3/8" F



Telescopic lances are on page 33.

Screw connections



R+M Nr.
525 901

Belt support kit for telescopic lances



R+M Nr.
525 920

Symbols Ⓜ outlet Ⓒ inlet ↔ length Ⓢ weight TYP type shipment by truck