

Nozzle protector and nozzle holder

For hydroblade®



1/4" F : M20 M.  
Nozzle holder.  
Stainless steel

M20x1 F.  
Nozzle protector.  
Brass

<b>R+M Nr.</b>
200 088 125

<b>R+M Nr.</b>
020 000 085

Gun extensions



1/4" M. Lance with insulation ST-28 Cool & Compact.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 028 303	1/4" M	300 mm	330 mm zinc-plated steel



1/4" M. Lance with insulation ST-9.9 and M22 F.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 009 945	M22 F	370 mm	zinc-plated steel



1/4" M. Lance with insulation ST-29 Cool & Compact.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 029 303	1/4" M	300 mm	330 mm stainless steel



1/4" M. Lance with insulation ST-9.9 and M22 F.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 009 940	M22 F	370 mm	zinc-plated steel



1/4" M. Lance with insulation ST-9.1 and M22 F.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 009 730	M22 F	350 mm	stainless steel
200 009 731	M22 F	350 mm	zinc-plated steel




1/4" M. Lance with moulded handle.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
070 004 340	1/4" M	400 mm	440 mm stainless steel



1/4" M. Lance with insulation ST-9.1 and coupling KW.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
200 009 750	coupling KW	260 mm	stainless steel

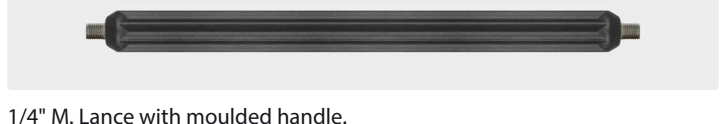

1/4" M. Lance with moulded handle.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
070 000 330	1/4" M	300 mm	330 mm zinc-plated steel
070 000 240	1/4" M	400 mm	440 mm zinc-plated steel



1/4" M. Lance with insulation and M22 F.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
202 300 400	M22 F	340 mm	zinc-plated steel



1/4" M. Lance with moulded handle.  
Max. 400 bar / 150 °C

<b>R+M Nr.</b>			
070 003 229	1/4" M	300 mm	330 mm stainless steel