


## Gun extensions with handle

**new**

1/4" M. Lance with handle and insulation ST-28.2/ST-29.2 Cool & Compact. Max. 400 bar / 150 °C

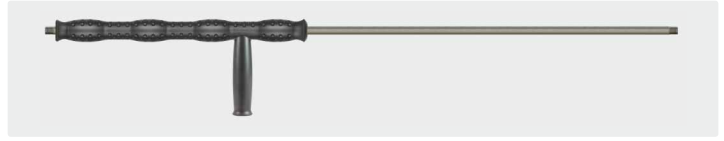

R+M Nr.	☉	ISO	↔	M
200 028 204	1/4" M	400 mm	430 mm	zinc-plated
200 029 204	1/4" M	400 mm	430 mm	stainless steel

R+M Nr.	☉	ISO	↔	M
200 028 210	1/4" M	400 mm	1,000 mm	zinc-plated
200 029 210	1/4" M	400 mm	1,000 mm	stainless steel

## Insulations for lances


### Insulations ST-9.9



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 935

### Vented handles ST-9



Vented handle 380 mm. Suitable for 1/4" lances. Max. 150 °C


R+M Nr.
200 009 510



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 936

## Adapter for lances



**new**


M18 M : TR20 F. K-Lock 8. Brass.  
Max. 400 bar / 150 °C

R+M Nr.
565 686

## Lance holder, two-piece



**new**

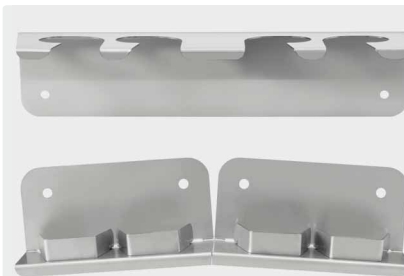

**new**



**new**

For lances with R + M / Suttner insulation and connection: Plug nipple or male thread.

R+M Nr.
105 610 050

For all lances with R + M / Suttner insulation. With 4 lance fixations for mounting for connection: hand screw coupling or female thread

R+M Nr.
105 610 055

Lance fixation for lances with screw coupling or female thread. For individual retrofitting

R+M Nr.
105 610 004

Symbols ☉ outlet ISO insulation ↔ length M material