

Vario nozzles and triple nozzles



1/4" F. Housing black. Max. 250 bar / 80 °C


R+M Nr.	D
657 545	045
657 555	055
657 560	06



M18 F. Housing black. Max. 250 bar / 80 °C

R+M Nr.	D
657 545 1	045
657 555 1	055
657 560 1	06

Functional principle triple nozzles

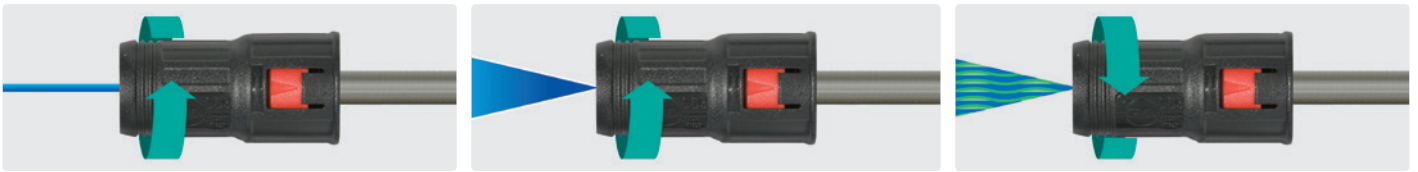

high pressure zero angle

high pressure broad angle 25°

low pressure broad angle 40°

Adjustable nozzles

Mini adjustable nozzles



R+M Nr.	↺	↻
657 20	1/4" F	1/4" F

R+M adjustable nozzles




R+M Nr.	↺	↻
657 30	1/4" F	1/4" F

ST-51 adjustable nozzles



R+M Nr.	↺	↻
200 051 530	1/4" F	1/4" F


Functional principle of a adjustable nozzle

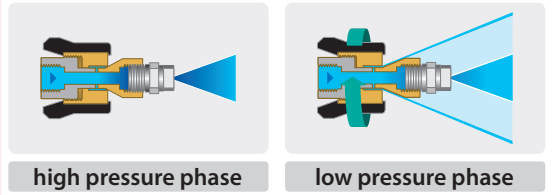

high pressure phase

low pressure phase

Universal bracket

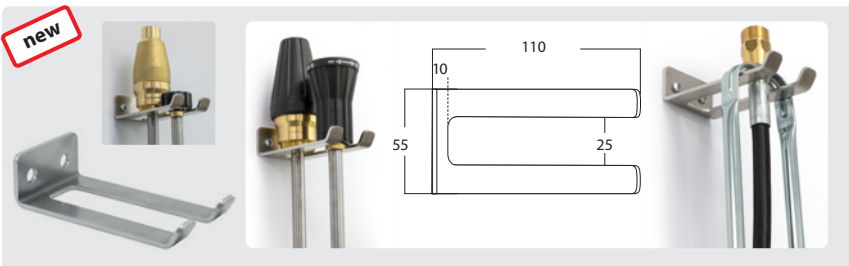

R+M Nr.
710 400 097

Stainless steel bracket for wall mounting

* lance