


Mosmatic rotor arms

- » Completely made out of stainless steel. Light, rugged and welded by robots. Available as part or surface cleaner.
- » Further versions are available on request.
- » Inlet 3/8" F.
- » Outlet: 1/4" F
- » Max. 250 bar / 120 °C

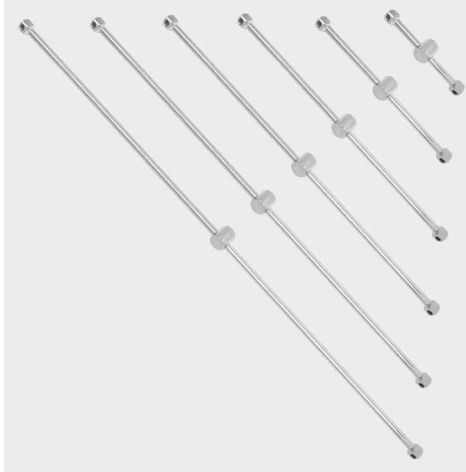

R+M Nr.	∅
108 827 05	100 mm
108 827 07	200 mm
108 827 09	300 mm
108 827 11	400 mm
108 829 75	470 mm
108 827 13	500 mm
108 827 15	600 mm

ST-550 foot valves



Housing stainless steel.
Valve stainless steel.
Rubber feet.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.	∅	⊗
200 550 600	1/4" F	1/4" F
200 550 620	M22 F	M22 M

Mosmatic surface cleaner with air recovery system and integrated gum remover



LTF



- » Such as the other devices of the FL-AH series the new FL-AH-KAU is a record performance regarding quality, finish and excellent cleaning result. We do not know anybody who has not yet seen places such as railway stations, stadiums, schools and many more which are covered with hundreds of chewing gums. This development is the best solution against this appearance!
- » In order to ensure an effective removal of the gums the special nozzle is positioned behind the stainless steel cap. The surface is cleaned in a conventional way by means of the gun which is mounted at the right side. In case of removing stubborn dirt e.g. chewing gums the special nozzle is switched on by the gun mounted at the left side. The gums are cut up and totally removed by the hp jets and finally sucked in.
- » By means of four 100 mm plastic rolls the surface cleaner can be easily moved.
- » The frame as well as all mounting parts made out of stainless steel offer additional stability. Best cleaning results are achieved due to the height adjustable housing.
- » The swivel has reinforced self-lubricating stainless steel ball bearings and a dual spring based carbide seal system especially designed for higher revs. This combination guarantees a very long durability.
- » 2 spray guns ST-2605 equipped with the patented LTF technology, 2 hp nozzles 15° 03 and a special nozzle for the removal of chewing gums are included. Further nozzle sizes are available on request.
- » Suitable for 50 mm suction hose. Suction hose is excluded.
- » Max. 350 bar / 120 °C. Min. 15 l/min / 250 bar

R+M Nr.	∅	⊗	⊠
108 809 61	520 mm	3/8" F	20 kg

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.