

PUReClean365+® - food hose

PUReClean365+® 40

Female thread DKR 1/2"



Male thread (AGR) 1/2"

Female thread DKR 1/2"

Male thread (AGR) 1/2"

-20 °C - +70 °C. Fittings stainless steel

-20 °C - +70 °C. Fittings stainless steel



R+M Nr.	Length
476 456 202 59	2.5 m
476 456 210 9	10.0 m
476 456 215 9	15.0 m
476 456 220 9	20.0 m
476 456 225 9	25.0 m
476 456 230 9	30.0 m
476 456 235 9	35.0 m
476 456 240 9	40.0 m

R+M Nr.	Length
476 446 202 59	2.5 m
476 446 210 9	10.0 m
476 446 215 9	15.0 m
476 446 220 9	20.0 m
476 446 225 9	25.0 m
476 446 230 9	30.0 m
476 446 235 9	35.0 m
476 446 240 9	40.0 m

R+M Nr.	Length
476 256 702 59	2.5 m
476 256 710 9	10.0 m
476 256 715 9	15.0 m
476 256 720 9	20.0 m
476 256 725 9	25.0 m
476 256 730 9	30.0 m
476 256 735 9	35.0 m
476 256 740 9	40.0 m

R+M Nr.	Length
476 246 702 59	2.5 m
476 246 710 9	10.0 m
476 246 715 9	15.0 m
476 246 720 9	20.0 m
476 246 725 9	25.0 m
476 246 730 9	30.0 m
476 246 735 9	35.0 m
476 246 740 9	40.0 m




PUReClean365+® 40 per metre

PUReClean365+® 40 per metre

R+M Nr.	DN	Length	Weight	P 20 °C	P 70 °C	BP 20 °C	Other
303 660 42	12	10 - 100 m	4.5	100 bar	45 bar	≥ 250 bar	0.25 kg

R+M Nr.	DN	Length	Weight	P 20 °C	P 70 °C	BP 20 °C	Other
303 660 43	12	10 - 100 m	4.5	100 bar	45 bar	≥ 250 bar	0.25 kg

Screw fittings for PUReClean365+®

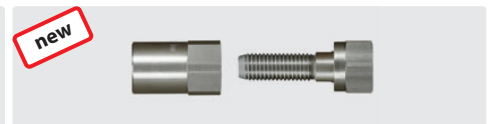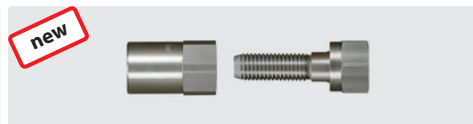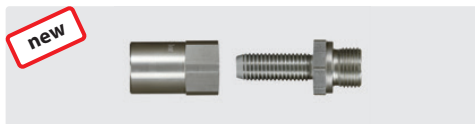

1/2" M with 60° cone. Stainless steel. Max. 50 bar

1/2" F with 60° cone. Stainless steel. Max. 50 bar

1/2" F. Stainless steel. Max. 50 bar. Flat sealing

R+M Nr.	DN
329 412 129	12

R+M Nr.	DN
329 512 129	12

R+M Nr.	DN
329 612 129	12

PUReClean365+® - 40 food hoses with the professional flat ST-3225

Food Special SET

Professional ST-3225 gun with progressive closing system and coupling ST-3100. Inlet 1/2" F swivel. Stainless steel. Max. 24.5 bar or 60 bar. Max. 120 l/min / 100 °C. with PUReClean365+ 40 food hose 1/2" male thread AGR. 45 bar workingpressure at 70 °C

ST-3225 / PUReClean365+ 40 blue

ST-3225 / PUReClean365+ 40 yellow

ST-3225 / PUReClean365+ 40 green

ST-3225 / PUReClean365+ 40 red



R+M Nr.	ST-3225 P	Length
476 046 620 91	24.5 bar	20 m
476 046 625 91	24.5 bar	25 m
476 046 630 91	24.5 bar	30 m
476 046 620 92	60 bar	20 m
476 046 625 92	60 bar	25 m
476 046 630 92	60 bar	30 m

R+M Nr.	ST-3225 P	Length
476 346 420 91	24.5 bar	20 m
476 346 425 91	24.5 bar	25 m
476 346 430 91	24.5 bar	30 m
476 346 420 92	60 bar	20 m
476 346 425 92	60 bar	25 m
476 346 430 92	60 bar	30 m

R+M Nr.	ST-3225 P	Length
476 446 220 91	24.5 bar	20 m
476 446 225 91	24.5 bar	25 m
476 446 230 91	24.5 bar	30 m
476 446 220 92	60 bar	20 m
476 446 225 92	60 bar	25 m
476 446 230 92	60 bar	30 m

R+M Nr.	ST-3225 P	Length
476 246 720 91	24.5 bar	20 m
476 246 725 91	24.5 bar	25 m
476 246 730 91	24.5 bar	30 m
476 246 720 92	60 bar	20 m
476 246 725 92	60 bar	25 m
476 246 730 92	60 bar	30 m