


easywash365+ foam sets

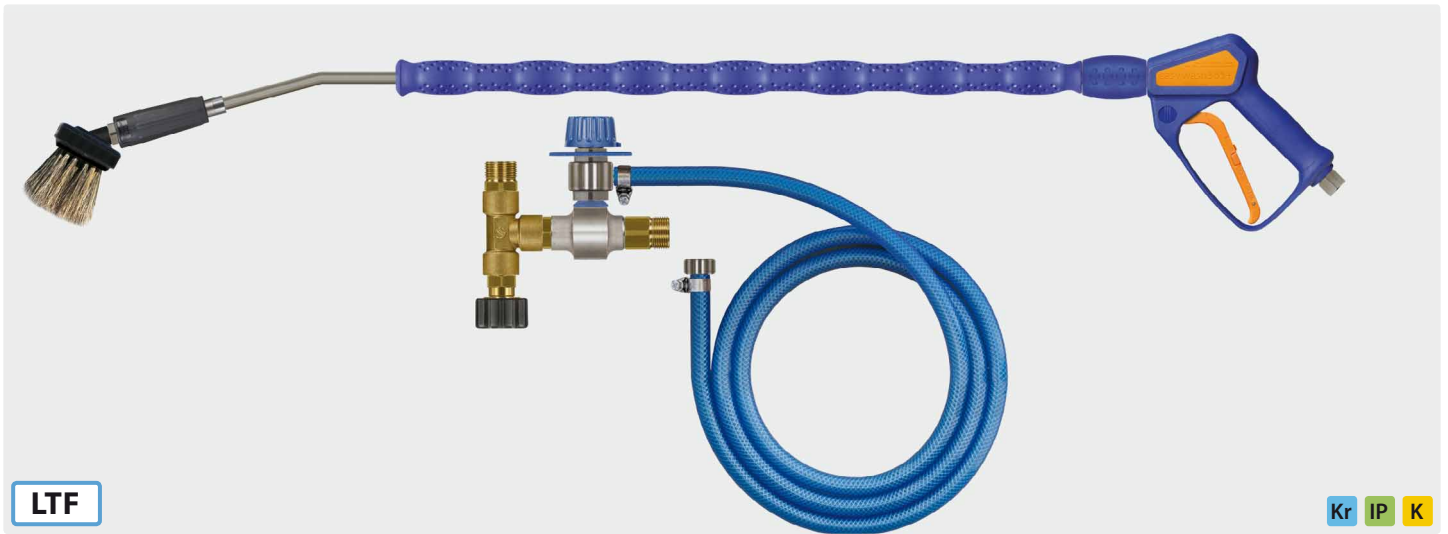

LTF

Kr IP K

easywash365+ foam set: easywash365+ spray gun, lance and brush with turbofoam365+ air injector by Suttner and injector ST-160 (M22 F and 2 x M22 M) with metering valve ST-161, suction hose 1,000 mm and suction filter ST-32. Max. 310 bar / 90 °C

R+M Nr.		↔ lance and brush	Ⓒ
502 600 100 000	lance and brush with turbofoam365+ air injector (1.9 mm)	900 mm	3/8" F swivel
502 601 100 000	lance and brush with turbofoam365+ air injector (1.9 mm)	1,200 mm	3/8" F swivel

**The following hoses are
highly recommended
for easywash365+ foam sets**

QSC : male
thread

M22 : 3/8"



Hoses with single wire braid and wrapped cover

TYP	DN	P	°C	↔	R+M Nr.
1SN	8	315 bar	150 °C	10 m	343 103 310
				15 m	343 103 315
				20 m	343 103 320
				30 m	343 103 330

Symbols Ⓒ inlet Ⓓ outlet DN nominal diameter P pressure °C temperature ↔ length TYP type D nozzle ISO insulation