

easyfoam365+ injectors by Suttner

Injectors ST-160



3/8" F : 3/8" M : hose tail 9 mm. Injector for applications with chemicals and foam. The chemical dosing is adjusted by 10 exchangeable nozzle inserts (0.5 - 2.0 mm).  
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 498	1.1 mm
200 160 499	1.2 mm
200 160 500	1.3 mm
200 160 505	1.4 mm
200 160 510	1.5 mm
200 160 515	1.6 mm
200 160 520	1.7 mm
200 160 525	1.8 mm
200 160 530	1.9 mm
200 160 535	2.0 mm
200 160 540	2.1 mm
200 160 545	2.2 mm
200 160 550	2.3 mm
200 160 560	2.5 mm
200 160 575	2.8 mm



3/8" F : 3/8" M : hose tail 9 mm. Injector ST-160 with metering valve ST-161.  
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 599	1.1 mm
200 160 600	1.2 mm
200 160 601	1.3 mm
200 160 602	1.4 mm
200 160 603	1.5 mm
200 160 604	1.6 mm
200 160 605	1.7 mm
200 160 606	1.8 mm
200 160 607	1.9 mm
200 160 608	2.0 mm
200 160 609	2.1 mm
200 160 610	2.2 mm
200 160 611	2.3 mm
200 160 613	2.5 mm
200 160 614	2.8 mm

Injectors ST-166



3/8" F : 3/8" M : 2 hose tails 9 mm. Injector for applications with chemicals and foam. The injector sucks in/admixes up to two chemicals at the same time. The chemical dosing is adjusted by 2 x 10 exchangeable nozzle inserts (0.5 - 2.0 mm).  
Max. 350 bar / 90 °C

R+M Nr.	D
200 166 500	1.3 mm
200 166 510	1.6 mm
200 166 530	1.9 mm

Valve lock



Valve lock for metering valve ST-161

R+M Nr.
040 003 566

easyfoam365+ injector unit ST-160



M22 M : M22 M. Injector ST-160 with metering valve ST-162. including chemical suction set comprising of suction hose DN 8 blue. 1.500 mm. suction filter ST-31 and chemical-resistant plastic tube. 320 mm. Lockable in sturdy stainless steel box.  
Max. 350 bar / 90° C

R+M Nr.	D
105 160 100	1.1 mm
105 160 101	1.2 mm
105 160 102	1.3 mm
105 160 103	1.4 mm
105 160 104	1.5 mm
105 160 105	1.6 mm
105 160 106	1.7 mm
105 160 107	1.8 mm
105 160 108	1.9 mm
105 160 109	2.1 mm
105 160 110	2.3 mm
105 160 111	2.8 mm



Wall brackets for canisters



Stainless steel.  
Mounting holes 8.5 mm

R+M Nr.	H x W x D	D
105 000 001	160 x 250 x 210	1.2
105 000 002	200 x 285 x 310	2.0

ST-160 wall mount

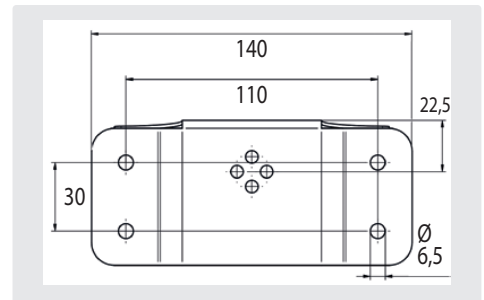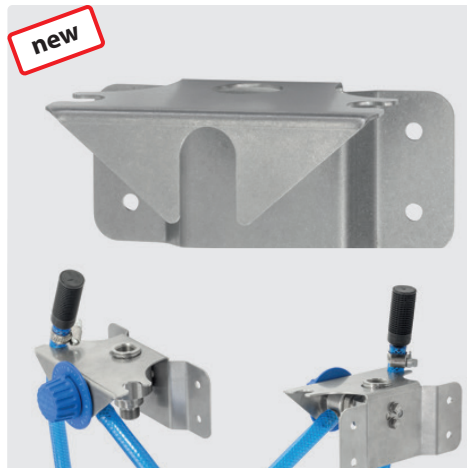

Stainless steel. Incl. fastening material for the injector.  
Fits for ST-160+161 and 166

R+M Nr.
200 160 160