


Ultra high pressure ball valves

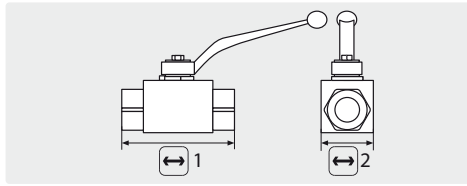


Stainless steel V4A / AISI 316 Ti. Ball stainless steel.  
Max. 500 bar / 80 °C

R+M Nr.	1	2	⊙
707 15	69 mm	26 mm	1/4" F
707 25	72 mm	32 mm	3/8" F
707 35	83 mm	35 mm	1/2" F

Sewer cleaning nozzles


Rotating nozzles RT . 1,000 bar

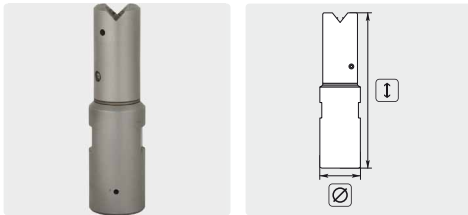

1/8" F. Side jet 2. Front jet 2. Stainless steel.  
Rotating body hp-bronze. Compact model,  
universally applicable. Extreme cleaning  
performance, removes hard deposits. 1 80 mm.  
⊙ 12 mm. Weight 0.18 kg.  
Max. 1,000 bar

R+M Nr.	1
652 710 006	6 l / 100 bar
652 710 012	12 l / 100 bar
652 710 014	14 l / 100 bar

Rotating nozzles RH . 1,000 bar

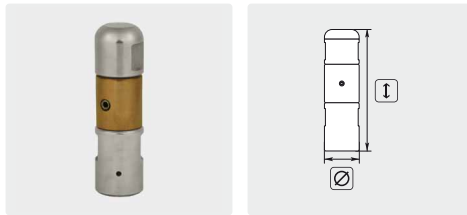

1/8" F. Side jet 2. Stainless steel. Rotating  
body hp-bronze. Compact model, universally  
applicable. Extreme cleaning performance,  
removes hard deposits. 1 63 mm. ⊙ 12 mm.  
Weight 0.18 kg.  
Max. 1,000 bar

R+M Nr.	1
652 810 006	6 l / 100 bar
652 810 010	10 l / 100 bar
652 810 014	14 l / 100 bar

Nozzles for sewer cleaning

Suttner nozzles for sewer cleaning ST-49.3



1/8" F. Nozzle with traction. Stainless steel.  
Hardened stainless steel body. Compact model,  
universally applicable. Extreme cleaning  
performance.  
⊙ 12 mm.  
Max. 500 bar

R+M Nr.	D
200 049 950	05
200 049 970	07

Suttner flow switches

ST-505 flow switches 600 bar



Floater VA with hole.  
Contact 1 A - 250 V.



Floater ST-505 with hole

R+M Nr.	
200 005 301	



R+M Nr.	cable 1
200 005 435	1,200 mm
200 005 438	3,500 mm

R+M Nr.	⊙	mount	closed/open	°C	1	cable 1
200 505 706	3/8" F	vertical	3.3/1.8	80	30 l/min	1,200 mm
200 505 709	3/8" F	vertical	2.9/1.7	80	30 l/min	3,600 mm



Floater brass with hole.  
Contact 1 A - 250 V.



Floater ST-505 without hole



R+M Nr.	cable
200 005 435	1,200 mm
200 005 438	3,500 mm

R+M Nr.	⊙	mount	closed/open	°C	1	cable 1
200 505 708	3/8" F	vertical	0.5/0.1	80	30 l/min	1,200 mm
200 505 711	3/8" F	vertical	0,5/0.1	80	30 l/min	3,600 mm



Floater VA without hole. Contact 1 A - 250 V



Floater ST-505 without hole

R+M Nr.	
200 005 311	

REED switch

R+M Nr.	
200 005 438	

R+M Nr.	⊙	mount	closed/open	°C	1	cable 1
200 505 707	3/8" F	vertical	1.8/1.3	80	30 l/min	1,200 mm