

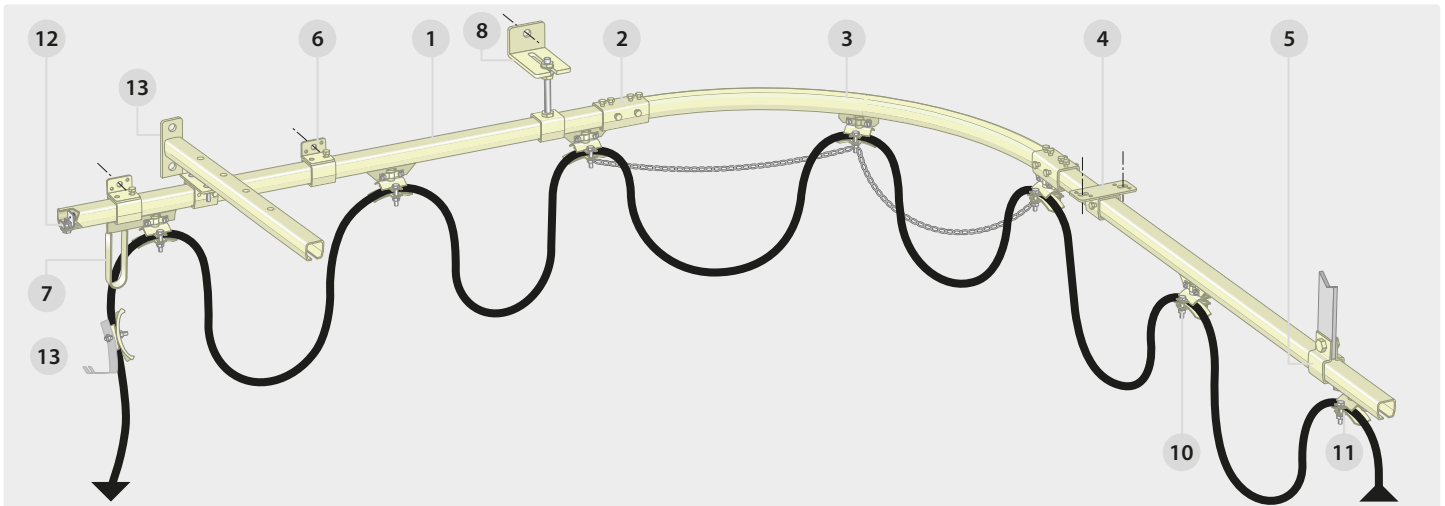
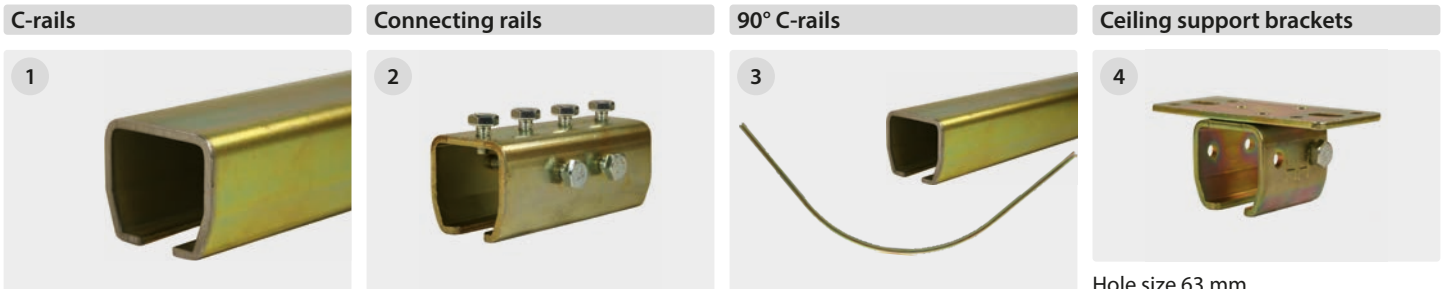


## Hose guide system . zinc-plated steel . 28 x 30 mm profile

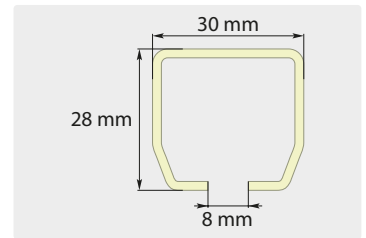

In case of angle installation it is recommended to connect the trolleys with a chain.

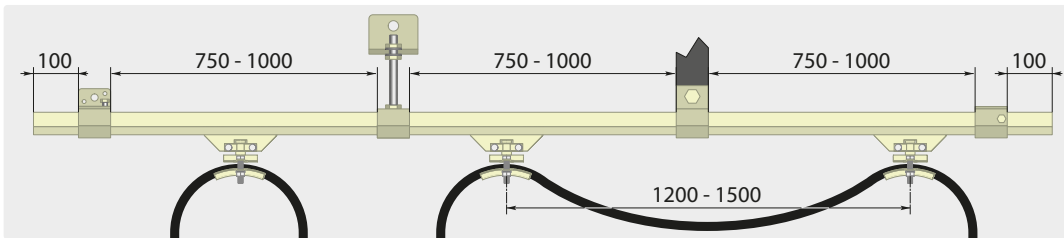

<b>R+M Nr.</b>	
107 008 0	6 m

<b>R+M Nr.</b>	
107 208 0	80 mm

<b>R+M Nr.</b>	<b>radius</b>
107 508 0	650 mm

Hole size 63 mm


<b>R+M Nr.</b>	
107 608 0	40 mm

**Mount base for flat iron**

**Wall mount base**

**Mounting brackets**

**Adjustable bracket in height + double wall angle**

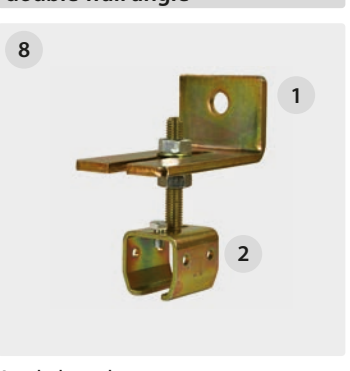

<b>R+M Nr.</b>	
107 908 0	40 mm

<b>R+M Nr.</b>	
107 108 0	40 mm

<b>R+M Nr.</b>	
107 901 0	1 300 mm
107 902 0	2 $\sqrt{VPE} = 50$

Angle length 100 mm

<b>R+M Nr.</b>		<b>TYP</b>
107 808 1	1	angle
107 808 2	2	sleeve

Please use the hose guide system made out of stainless steel in case of saline conditions!