


Vacuum hoses oil-resistant

Hose profile-coiled made out of polyester-elastomer.
 Features: An internally smooth profile hose made out of full plastic having a very low flow resistance and a good reset force (after pressing it together or bending it over) with excellent flexibility, high resistance to oil and fuel.
 Range of applications: industrial vacuum cleaner, chemical plant engineering, conveyor and extraction systems, car exhaust systems, hot air.
 Temperature range: - 60 °C - + 120 °C (temporary up to + 150 °C)

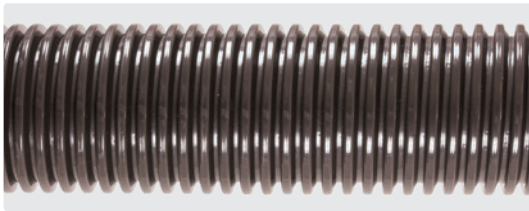

R+M Nr.	TYP	DN	Outer Ø	↔
263 644 *	A	36 mm	44.7 mm	1 - 20 m
263 644 20	A	36 mm	44.7 mm	20 m
265 044 *	L	50 mm	61.0 mm	1 - 25 m
265 044 25	L	50 mm	61.0 mm	25 m

Suction swivel arm easywash365+


New for self-service vacuum cleaning
 » entirely made out of stainless steel
 » solid construction
 » suspension
 » The vertical **easywash365 +** suction swivel arm for self-service! This cost-effective solution is ideal for single suction places. In this case, the arm does not necessarily have to be integrated into the cabinet technology, but can be easily mounted on a wall. Perfect if space might be limited, because due to its construction this boom needs little space and bending over offers a lot of mobility.
 » The built-in spring prevents kinking of the suction hose and allows a barrier-free handling with optional freedom of mobility.
 » The vertical **easywash365 +** suction swivel arm is completely made out of stainless steel and is supplied including a mounting bracket.
 » Height 2,320 mm. Tube height 1,500 mm. Internal tube diameter of 65 mm. Weight 10.1 kg



R+M Nr.
109 001 500

Crevice tool holder

Designed for central vacuum systems
 » Attachment on wall, pillar, housing or floor
 » Extremely robust and stable
 » Stainless steel design, ground and brushed
 » Holders are designed for the new hose sleeves, which can also be easily swivelled under vacuum:
 Holder for **264 052 9 for 45 mm**, accessories in conjunction with crevice nozzle 264 019 3 - 264 019 458 mm. Accessorie: 264 053 0
 Holder for **264 053 0 for 58 mm**, accessories in conjunction with crevice nozzle 265 020 - 265 022 - 265 022 1

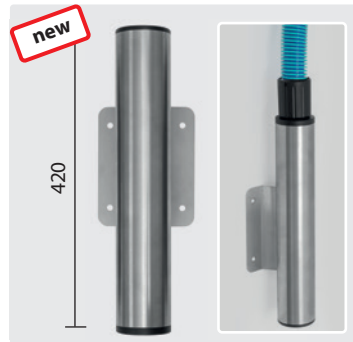

Crevice nozzle holder for wall mounting.
 Stainless steel

R+M Nr.	Ø
105 610 010	45 mm
105 610 011	58 mm



Crevice nozzle holder on column for floor mounting.
 Stainless steel

R+M Nr.	Ø
105 610 012	45 mm
105 610 013	58 mm



Double crevice nozzle holder on column incl. adapter plate.
 Stainless steel

R+M Nr.	Ø
105 610 014	45 mm
105 610 015	58 mm

Ⓢ ⓐ = DN 32 . ⓑ = DN 38 . ⓐ = DN 50 . Ⓡ = DN 38 . ⓑ = 35 mm . Ⓒ = 45 mm . ⓓ = 38 mm . ⓔ = 50 mm . ⓕ = 58 mm

* per metre

