

## easyfoam365+ injectors by Suttner


### Injectors ST-160 with metering valve ST-161



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 zinc-plated steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

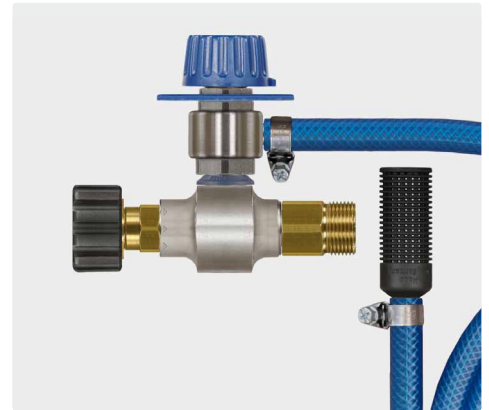


M22 F : M22 M. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 350 bar / 90 °C

R+M Nr.	D
200 160 845	1.2 mm
200 160 846	1.3 mm
200 160 847	1.4 mm
200 160 848	1.5 mm
200 160 849	1.6 mm
200 160 850	1.7 mm
200 160 851	1.8 mm
200 160 852	1.9 mm
200 160 853	2.0 mm
200 160 854	2.1 mm
200 160 855	2.2 mm
200 160 856	2.3 mm

R+M Nr.	D
200 160 860	1.2 mm
200 160 861	1.3 mm
200 160 862	1.4 mm
200 160 863	1.5 mm
200 160 864	1.6 mm
200 160 865	1.7 mm
200 160 866	1.8 mm
200 160 867	1.9 mm
200 160 868	2.0 mm
200 160 869	2.1 mm
200 160 870	2.2 mm
200 160 871	2.3 mm

R+M Nr.	D
200 160 803	1.2 mm
200 160 804	1.3 mm
200 160 800	1.4 mm
200 160 801	1.5 mm
200 160 802	1.6 mm
200 160 805	1.7 mm
200 160 806	1.8 mm
200 160 808	2.0 mm
200 160 809	2.1 mm
200 160 810	2.2 mm
200 160 811	2.3 mm

### Reinforced PVC hoses blue

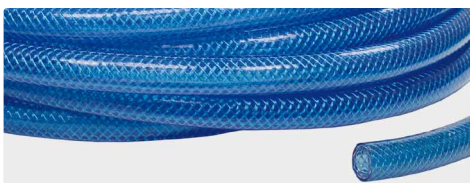

Max. 60 °C. Other dimensions are available on request

#### Per metre

R+M Nr.	DN	W
080 000 310	9 mm	3.0 mm
306 71	13 mm	3.0 mm

#### Complete rolls

R+M Nr.	DN	L	W
306 560 50	9 mm	50 m	3.0 mm
306 710 50	13 mm	50 m	3.0 mm

### Suction filter ST-31



Filter without check valve. Plastic. Stainless steel weight



Filter with check valve. Plastic. Stainless steel weight

R+M Nr.
200 031 615

R+M Nr.
200 031 611

### Accessories injectors



Hose tail 9 mm : M14 M. Check valve



1/4" M : M14 M. Check valve

R+M Nr.
200 163 350

R+M Nr.
200 163 356

Symbols  $\square$  nozzle  $\rightarrow$  length  $\boxtimes$  wall thickness DN nominal diameter C colour