



High pressure gauges glycerine filled




Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom

R+M Nr.	pressure range
549 00	0 - 40 bar . 0 - 580 PSI
549 10	0 - 100 bar . 0 - 1,500 PSI
549 20	0 - 160 bar . 0 - 2,500 PSI
549 30	0 - 250 bar . 0 - 4,000 PSI
549 40	0 - 400 bar . 0 - 6,000 PSI
549 50	0 - 600 bar . 0 - 8,000 PSI




Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the back

R+M Nr.	pressure range
548 10	0 - 100 bar . 0 - 1,500 PSI
548 20	0 - 160 bar . 0 - 2,500 PSI
548 30	0 - 250 bar . 0 - 4,000 PSI
548 40	0 - 400 bar . 0 - 6,000 PSI




Ø 63 mm. 1/4" M. With mounting ring.
Housing stainless steel. Inlet at the back

R+M Nr.	pressure range
549 90	0 - 250 bar . 0 - 4,000 PSI



Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom. Type WIKA


R+M Nr.	pressure range
549 102	0 - 100 bar . 0 - 1,500 PSI
549 202	0 - 160 bar . 0 - 2,500 PSI
549 302	0 - 250 bar . 0 - 4,000 PSI
549 402	0 - 400 bar . 0 - 6,000 PSI
549 502	0 - 600 bar . 0 - 8,000 PSI



Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the back. Type WIKA


R+M Nr.	pressure range
548 102	0 - 100 bar . 0 - 1,500 PSI
548 202	0 - 160 bar . 0 - 2,500 PSI
548 302	0 - 250 bar . 0 - 4,000 PSI
548 402	0 - 400 bar . 0 - 6,000 PSI
548 631 000	0 - 1,000 bar . 0 - 15,000 PSI

Connecting hoses

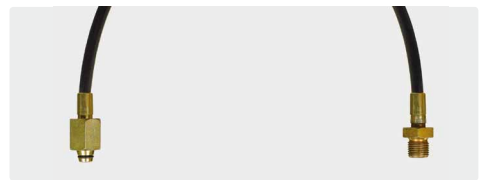


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	⊖	⊕
495 261 040 5	405 mm	M12x1.5 F	M10x1 M

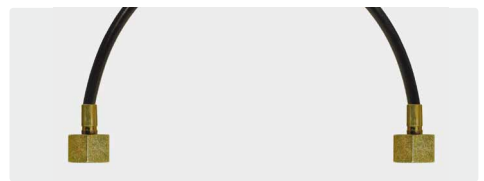


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	⊖	⊕
495 252 050 0	500 mm	1/4" F	1/4" F
495 252 070 0	700 mm	1/4" F	1/4" F




Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom. Type WIKA

R+M Nr.	pressure range
549 352	0 - 250 bar . 0 - 4,000 PSI
549 452	0 - 400 bar . 0 - 6,000 PSI




Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the back. Type WIKA

R+M Nr.	pressure range
548 352	0 - 250 bar . 0 - 4,000 PSI
548 432	0 - 400 bar . 0 - 6,000 PSI

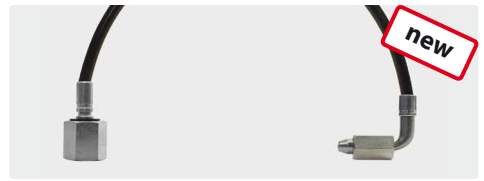


DN 2. Max. 250 bar / 65 °C

R+M Nr.	↔	⊖	⊕
495 253 100 0	1,000 mm	1/4" F	1/4" F 90°



Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom

R+M Nr.	pressure range
549 35	0 - 250 bar . 0 - 4,000 PSI
549 45	0 - 400 bar . 0 - 6,000 PSI



Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the back


R+M Nr.	pressure range
548 35	0 - 250 bar . 0 - 4,000 PSI
548 43	0 - 400 bar . 0 - 6,000 PSI

Fixing straps

for pressure gauges, except WIKA



R+M Nr.	TYP
548 50	Ø 63 mm
548 55	Ø 50 mm



Ø 40 mm. 1/8" M. Housing plastic.
Inlet at the back

R+M Nr.	pressure range
548 37	0 - 250 bar . 0 - 4,000 PSI

Before setting the gauge under pressure please open the tip of the rubber plug.