

## Mosmatic car wash ceiling booms with LED

### Plastic plugs, Mosmatic



Protects cables from rapid wear.  
For  $\varnothing$  50 mm Mosmatic wall-mount EV-Boom or pipe bends

R+M Nr.		
108 905 762	34 mm	POM


### Stop with rubber buffer, Mosmatic



Stop for wall mounting.  
Prevents 360° rotating EV boom.  
For all  $\varnothing$  50 mm Mosmatic wall-mount EV-Boom

R+M Nr.	length / height / depth mm	
108 603 19	900 / 70 / 82	stainless steel/rubber

### Clip flue, Mosmatic

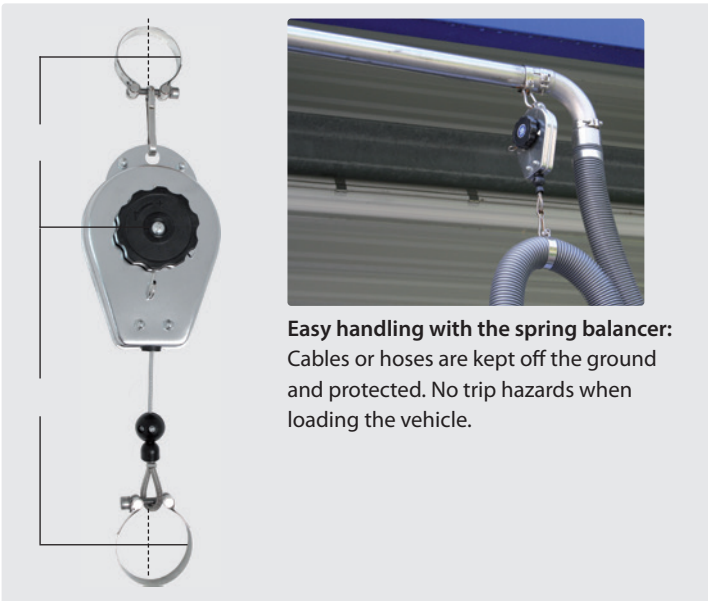

**Easy handling with the spring balancer:**  
Cables or hoses are kept off the ground and protected. No trip hazards when loading the vehicle.

1.5 meter wire rope, extendable.  
For mounting on EV Boom to attach the charging cable.  
2 screw pipe clamps  $\varnothing$  50 / 60 mm

R+M Nr.		
108 603 20	185 - 1,600 mm	stainless steel

### Elbow 45°, Mosmatic



Stainless steel. For  $\varnothing$  50 mm Mosmatic wall-mount EV-Boom.  
Incl. screw pipe clamp for attachment to the wall boom.  
Cable routing and outlet: 45°

R+M Nr.		
108 603 28	225 mm	50 mm

### Elbow 90°, Mosmatic



Stainless steel. For  $\varnothing$  50 mm Mosmatic wall-mount EV-Boom.  
Incl. screw pipe clamp for attachment to the wall boom.  
Cable routing and outlet: 90°

R+M Nr.		
108 603 14	160 mm	50 mm



**Sophisticated solutions for cables:**  
The plastic plug protects the cable from abrasion.

**Possible adaptation:**  
The pipe bends can be fastened with screw pipe clamps.

