

Surface cleaner Aqua Pro with integrated water recovery system, Mosmatic




LTF

- » The new Mosmatic Aqua Pro with an integrated water recovery system. This surface cleaner does not require an external industrial vacuum. Thanks to the venturi nozzle that is attached directly to the housing, waste water can be discharged with a standard vac hose. The Aqua Pro can clean and recover individually, or both at the same time.
- » Integrated recovery: The black anodized aluminum suction device collects the wastewater via the Venturi and double housing principal. Mount your export hose on the suction device and place it into the desired port to drain the water. The use of a vacuum system is no longer needed.
- » Stainless steel swivel castors: (Premium Quality) Four 4" stainless steel swivel castors with custom mounting brackets, ensure easy maneuvering even in confined spaces.
- » 2 spray guns ST-2605 equipped with the patented LTF technology
- » Incl. 2+1 high-pressure nozzles ex works, size 03 for 180 bar with 25 l/min. Optionally available on request: 2+1 high-pressure nozzles, size 02 as a set for 170 bar with 15 l/min.
- » Max. 350 bar / 120° C. **Not suitable for paved areas.**

R+M Nr.	Ø	C	P
108 807 69	520 mm	3/8" F	max. 350 bar

Surface cleaner with air recovery system and integrated gum remover, Mosmatic

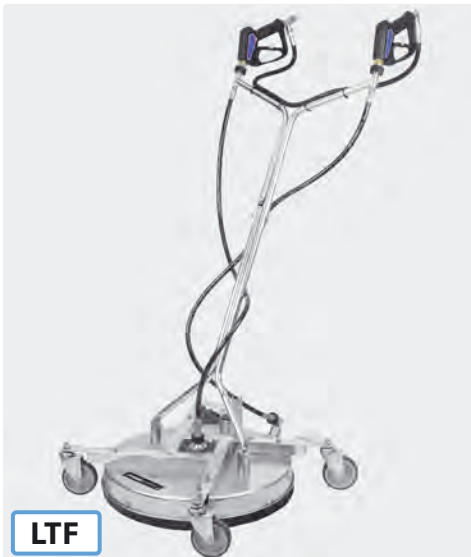

LTF



- » Such as the other devices of the FL-AH series the new FL-AH-KAU is a record performance regarding quality, finish and excellent cleaning result. We do not know anybody who has not yet seen places such as railway stations, stadiums, schools and many more which are covered with hundreds of chewing gums. This development is the best solution against this appearance!
- » In order to ensure an effective removal of the gums the special nozzle is positioned behind the stainless steel cap. The surface is cleaned in a conventional way by means of the gun which is mounted at the right side. In case of removing stubborn dirt e.g. chewing gums the special nozzle is switched on by the gun mounted at the left side. The gums are cut up and totally removed by the hp jets and finally sucked in.
- » By means of four 100 mm plastic rolls the surface cleaner can be easily moved.
- » The frame as well as all mounting parts made out of stainless steel offer additional stability. Best cleaning results are achieved due to the height adjustable housing.
- » The swivel has reinforced self-lubricating stainless steel ball bearings and a dual spring based carbide seal system especially designed for higher revs. This combination guarantees a very long durability.
- » 2 spray guns ST-2605 equipped with the patented LTF technology, 2 hp nozzles 15° 03 and a special nozzle for the removal of chewing gums are included. Further nozzle sizes are available on request.
- » Suitable for 50 mm suction hose. Suction hose is excluded.
- » Max. 350 bar / 120 °C. Min. 15 l/min / 250 bar

R+M Nr.	Ø	C	W
108 809 61	520 mm	3/8" F	20 kg

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.