

Suttner ultra high pressure lances

Lances with ergonomic swivel screw coupling



M22 M swivel Lance with ergonomic swivel screw coupling, vented handle ST-9 & grip and nozzle protector (M20x1) without tip. Max. 650 bar / 150 °C

R+M Nr.				
200 146 550 nozzle protector	700 mm	M22 F _{swivel}	stainless steel	

R+M Nr.

Suttner rotating nozzles with ceramic insert

ST-559 Suttner rotating nozzles with carbide insert

ST-558



1/4" F. 300 - 500 bar. Max. 90 °C

Kit ST-558

R+M Nr.		
200 558 540	04	brown
200 558 550	05	black
200 558 560	06	red


R+M Nr.
200 558 140
200 558 150
200 558 160

ST-559



1/4" F. 300 - 600 bar. Max. 90 °C

R+M Nr.	
200 559 520	02
200 559 530	03
200 559 540	04
200 559 550	05
200 559 555	055
200 559 560	06

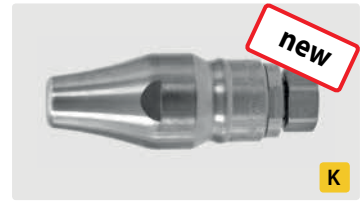

M20x1 F. 300 - 600 bar. Max. 90 °C

R+M Nr.	
200 559 320	02
200 559 330	03
200 559 340	04



Kit ST-559

R+M Nr.
200 559 120
200 559 130
200 559 140
200 559 150
200 559 155
200 559 160