


easywash365+




The choice of perfection

easywash365+ wall boom extension with ceiling boom

R+M Nr. 109 760 972 / 109 760 973

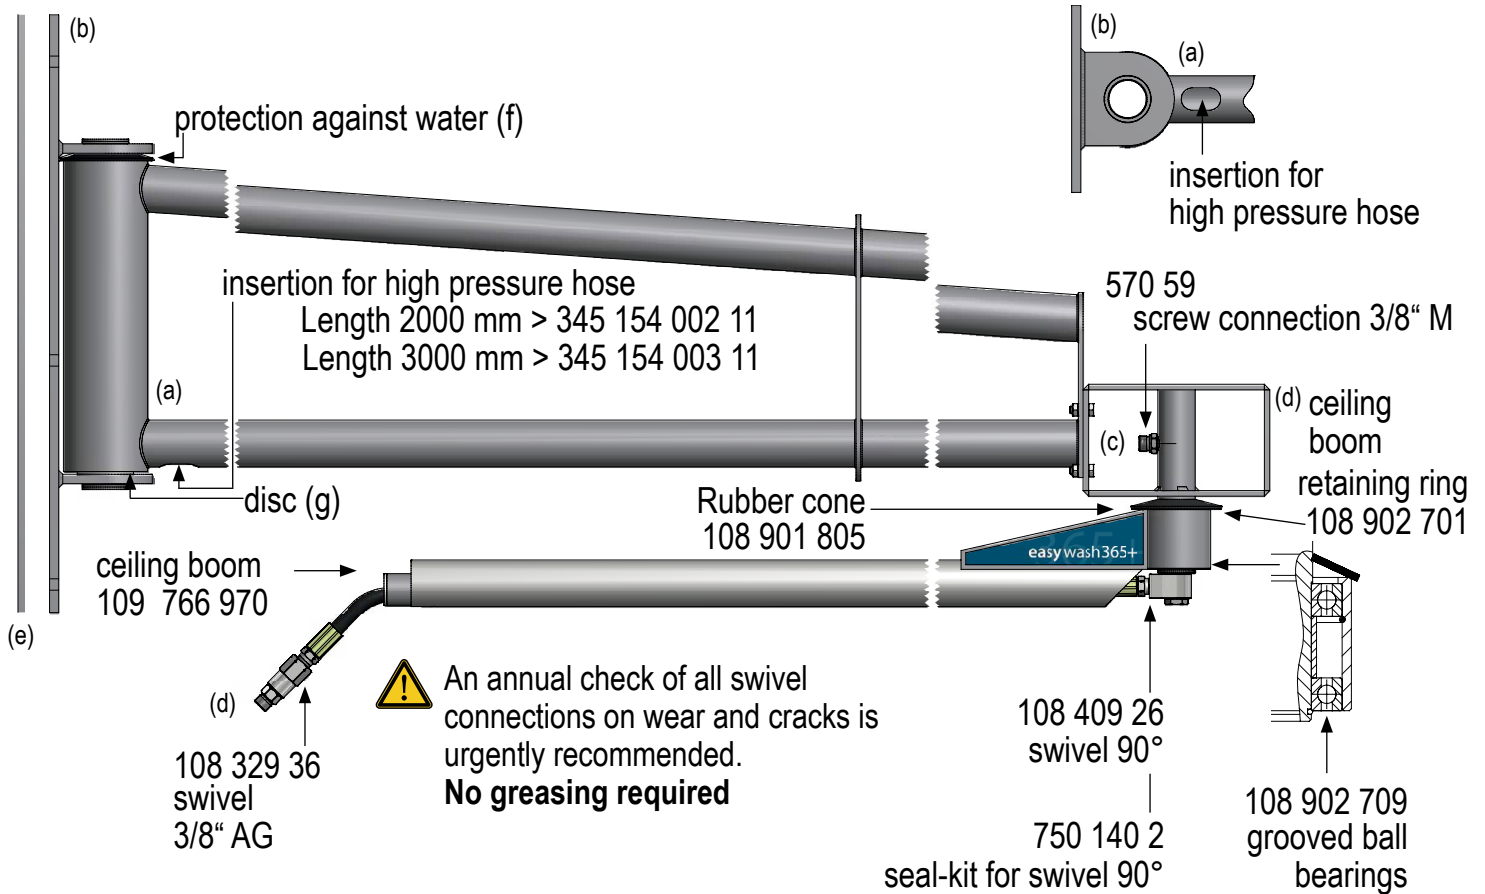

! An annual check of all swivel connections on wear and cracks is urgently recommended.
No greasing required

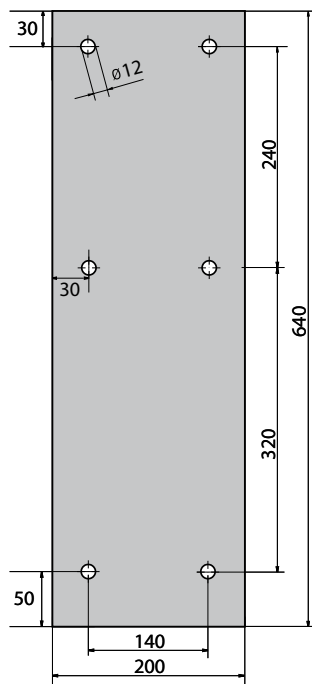

(e) counterplate (opt.)
109 790 419 3

Assembly instructions

1. Mounting part of the boom (b) needs to be fixed at the desired place (wall, bracket), please pay attention to the load capacity of the wall / bracket, if necessary, please use the optionally available counter plate (e). The boom (a) needs to be fixed with the bolt at the mounting part, the included protection against water (f) must be positioned on top under the bolt intake, the disc (g) needs to be placed on the lower bolt. Afterwards the bolt must be locked with the retaining ring. Please fix the wall boom extension by means of the 4 included screws. Please fix the ceiling boom (d) with the 4 included screws at the wall boom extension. The hose connection must be positioned in direction to the boom. The optionally available high pressure hose must be inserted into the provided hole on the side of the mounting part of the boom and needs to be moved up to the boom. Afterwards the hose needs to be attached to the connection of the ceiling boom (3/8").

Attention: bearable hole load (e.g.: bolt M12) at least 20 kN

2. Tightly fasten the high pressure hose or the high pressure pipe connection coming from the high pressure pump, to the inlet (c).
3. Tightly fasten the high pressure hose with lance or brush to the swivel (d).

! For your own safety

- Read all instructions before the initial operation. Check their proper condition and that they operate safely.
- Our products should only be installed by experienced users of high pressure equipment
- Always use protection gear when using products connected to high pressure.
- Never direct any high pressure water-jet at humans, animals or electric installations.
- Before any maintenance or nozzle-change, turn off the high pressure water supply, e.g.: turn off and secure the power switch.
- Safety regulations and guidelines (Accident Prevention Rules) from the manufacturer of your high pressure cleaner are applicable.
- Nozzle installation according to Nozzle manufacturer.
- No modifications to the unit are permitted.