



The choice of perfection

tank and barrel cleaner

The prices are cut for you:

- ST-82 h16/40 self rotating tank cleaner
- ST-82 h16/120 self rotating tank cleaner
- ST-82 e25 / 21 power-operated barrel cleaner CE
- M 28 E power-operated barrel cleaner with exhaust + CE

Ask for your personal offer today!

fax	+49 (0) 20 51-94 85 7-3400
address	R+M de Wit GmbH . Heidestraße 11 . 42549 Velbert . Germany
email	info@rm-suttner.com
questions?	phone +49 (0) 20 51-94 85 7-0

You are invited to send us your enquiry today in order to profit from our professional R+M / Suttner tank and barrel cleaner as soon as possible.

Of course, every tank cleaner is individually set up to your requirements and delivered ready for operation.

Suttner tank cleaner

ST-82 h16/40 self rotating tank cleaner



- » Inlet: 1/2" F
- » Pressure: 40 - 160 bar
- » Flow: 20 - 30 l / min
- » Temperature: 0 - 90 °C
- » Turns: 29 - 36 r.p.m
- » Beam coverage 244°
- » Weight: 3.6 kg
- » 3 nozzles needed 1/8" M NPT
- » Other versions on request 20 - 50 l/min

R+M Nr.	D	←	P
200 082 600		basic version without nozzle	
200 082 601	3 x 060	40 l/min	100 bar
200 082 602	3 x 030	21 l/min	110 bar

ST-82 h16/120 self rotating tank cleaner



- » Inlet: 3/4" F
- » Pressure: 30 - 160 bar
- » Flow: 20 - 120 l/min
- » Temperature: 0 - 90 °C
- » Turns: 10 - 16 r.p.m
- » Beam coverage 360°
- » Weight: 5.9 kg
- » 2 nozzles and 2 caps needed, max. 4 nozzles 1/4 " M NPT



R+M Nr.	D	←	P
200 082 700		basic version without nozzle	
200 082 702	2 x 060	27 l/min	100 bar
200 082 701	2 x 075	34 l/min	100 bar
200 082 709	4 x 050	45 l/min	100 bar
200 082 708	2 x 110 *	48 l/min	100 bar
200 082 705	4 x 055 *	50 l/min	100 bar
200 082 710	4 x 045	42 l/min	120 bar
200 082 704	2 x 040	21 l/min	140 bar
200 082 703	2 x 045	22 l/min	140 bar
200 082 706	2 x 060	32 l/min	140 bar
200 082 711	4 x 040 *	40 l/min	140 bar
200 082 707	4 x 040	45 l/min	160 bar

* with protection cage

Suttner barrel cleaner

ST-82 e25 / 21 power-operated barrel cleaner CE




- » Inlet: M22 M
- » Pressure: max. 220 bar
- » Flow: max. 21 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Beam coverage 360°
- » Weight: 3.2 kg
- » Nozzles are included in the scope of delivery

Our data sheets give you detailed information about our tank and barrel cleaner: <http://rm-suttner.com/suttner-tank-and-barrel-cleaner/?lang=en>

R+M Nr.
200 082 500

Barrel cleaner

M 28 E power-operated barrel cleaner with exhaust + CE

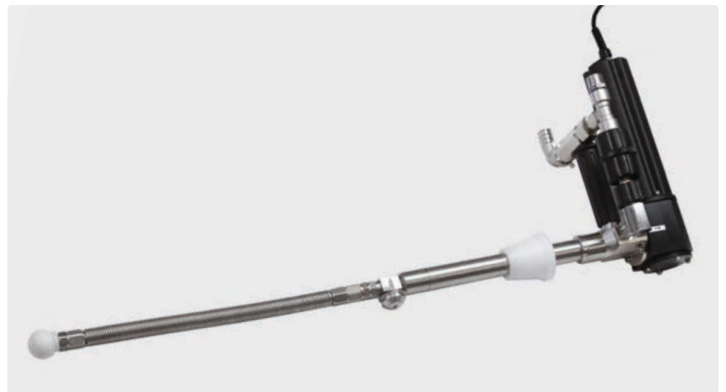

- » Inlet: M22 M
- » Pressure: max. 140 bar
- » Flow: 10 - 25 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Beam coverage 360°
- » Weight: 6.2 kg
- » Nozzles are included in the scope of delivery

Complying with the highest standards regarding the cleaning of barrels and tank systems! Your requirements are our strengths!

R+M Nr.
276 284 380

Please specify pressure and flow rate with your order.
The tank cleaner are always individually assembled to your needs.