

# R+M coin box easywash365+ including control box




The choice of perfection

easywash 365+



1 €, 2 €, 50 Cent, or chips

The control box can also be used with our 24 V - 50 Hz EMS coin boxes

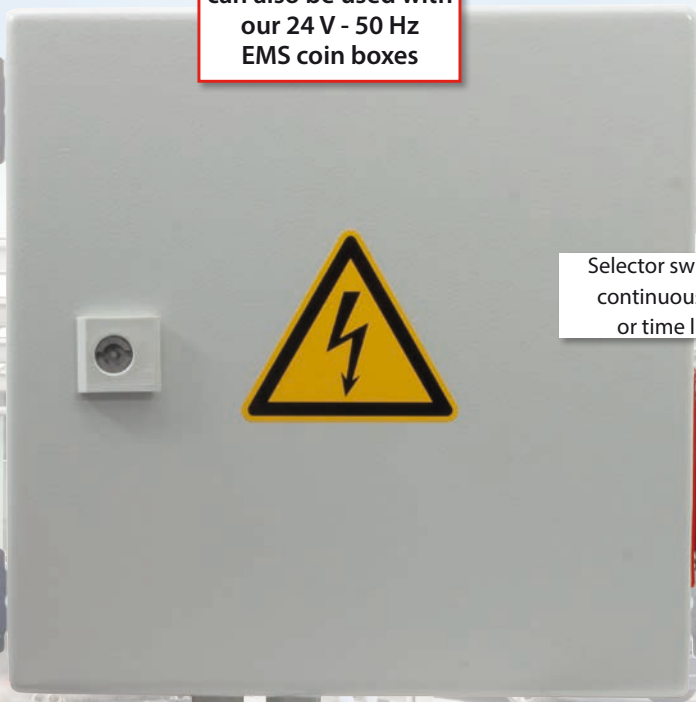

Selector switch for continuous duty or time limit



Connection:  
Five-wire control cable sold by metre (option)



## The complete solution easywash 365+, incl. coin box and control box, for a use by professionals

- **Coin box:** H x W x D: 260 x 160 x 110 mm, weight 3.5 kg.
- **Coin box** for 1 €, 2 €, 50 Cent, or chips feat. money return.
- UV-resistant control cable, 5 wires, optionally available.
- **Control box**, 400 V, sheet steel, RAL 7035 powder-coated, incl. key, lockable. Includes 4 adjustable angle brackets. Selector switch for time limit or continuous duty
- **Control box:** H x W x D: 300 x 300 x 155 mm, IP 66 featuring:
  - 2 m supply cable with CEE-plug 16 A, 400 VAC, 50 Hz, 3 Ph/N/PE
  - Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers
  - Motor output with power contactor 7.5 kW, wired to CEE add-on box
  - Time relay for pulse stretching 0.05 s - 10 h



**Euro coins or chips:**  
The R+M coin box 400 V with our new control box represents our professionally complete solution for your professional use.



Freely selectable: continuous duty or time limit.



2 meters with CEE plug

**Control box feat. adjustable angle brackets:** fixing dimensions of 330 x 245 mm.



**Black control cable:** UV-resistant. Desired length sold by metre.

# R+M coin box easywash365+ including control box



The choice of perfection

## Coin box easywash365+ including control box



R+M coin box, mechanical, feat. money return, incl. control box, IP 66, RAL 7035 feat. 2 m supply cable with CEE-plug, 16 A, 400 VAC, 50 Hz, 3 PH/N/PE. Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers. Motor output with power contactor 7.5 kW, wired to CEE add-on box. Feat. a time relay for pulse stretching 0.05 s - 10 h. Excl. control cable

R+M Nr.	money	coin box*	control box*
925 513 803	chip (profiled)	260 x 160 x 110	300 x 300 x 155
925 513 805	50 Cent	260 x 160 x 110	300 x 300 x 155
925 513 801	1 €	260 x 160 x 110	300 x 300 x 155
925 513 802	2 €	260 x 160 x 110	300 x 300 x 155

\* mm

## Control box easywash365+




Control box, IP 66, RAL 7035. H x W x D 300 x 300 s 155 mm. Feat. 2 m supply cable with CEE-plug 16 A, 400 VAC, 50 Hz, 3 Ph/N/PE. Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers. Motor output with power contactor 7.5 kW, wired to CEE add-on box. Feat. a time relay for pulse stretching 0.05 s - 10 h.

R+M Nr.	Weight
925 510 000	9.6 kg



Control cable. 5 wires, UV-resistant. Sold by metre.

R+M Nr.	Type
925 510 001	5 G 1.5 mm <sup>2</sup>

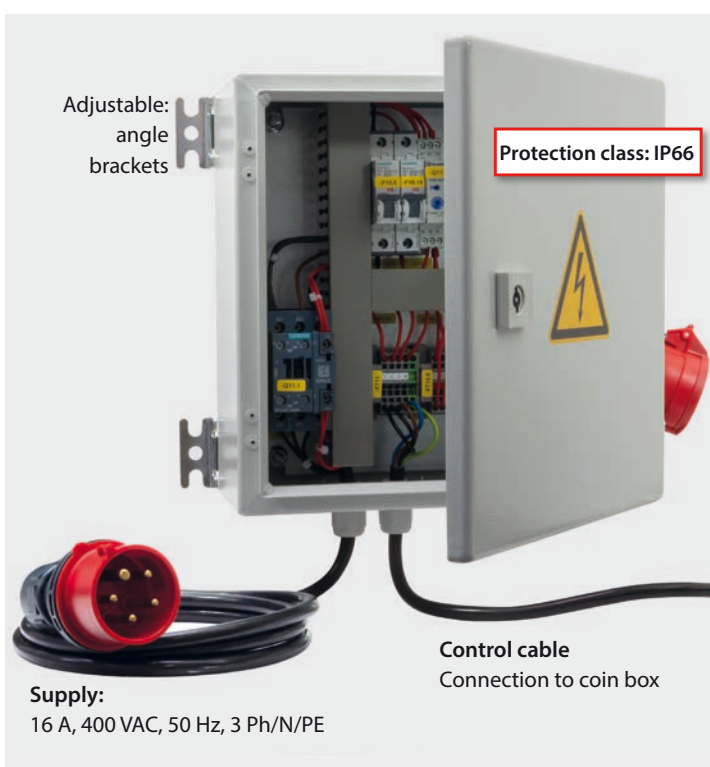

Adjustable:  
angle  
brackets

Protection class: IP66

Control cable  
Connection to coin box

Supply:  
16 A, 400 VAC, 50 Hz, 3 Ph/N/PE