


Regulation valves

VB75

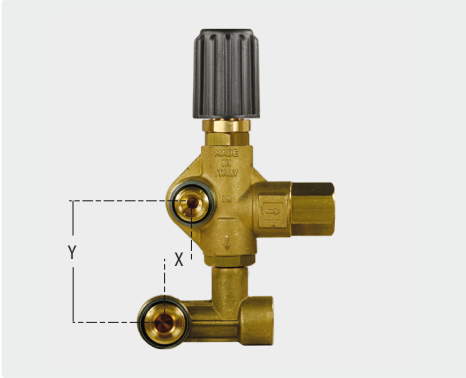

☉ = inlet 1/2" F. ☉ = outlet 3/8" F. Regulation valve with banjo-bolt. X: 19 mm. Y: 62-73 mm. Suitable for IP50, IP44, IP47, IP60, IP63 / Speck NP16. Max. 250 bar / 90 °C

R+M Nr.	☉	☉
532 093 0		30 l/min

VB85



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. Max. 90 °C

R+M Nr.	☉	☉	☉
532 851 6	max. 160 bar		80 l/min
532 852 8	max. 280 bar		80 l/min

Rep. Kit VB85



R+M Nr.
532 851 62

VB80



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. Stainless steel. Max. 90 °C

R+M Nr.	☉	☉
532 802 84	max. 280 bar	80 l/min

VB80/150



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. ☉ = pressure gauge 1/4" F. Max. 90 °C

R+M Nr.	☉	☉	☉
532 801 50	max. 150 bar		80 l/min

VB53/500



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. Max. 90 °C

R+M Nr.	☉	☉
532 535 00	max. 500 bar	80 l/min

VB26



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. Stainless steel. Max. 90 °C

R+M Nr.	☉	☉
532 262 80	max. 280 bar	80 l/min

VRT100/190



☉ = inlet 1/2" F. ☉ = outlet 1/2" F. ☉ = bypass 1/2" F. Max. 90 °C

R+M Nr.	☉	☉
532 056 0	max. 190 bar	100 l/min

Symbols ☉ inlet ☉ outlet ☉ bypass ☉ pressure gauge ☉ flow ☉ pressure